

Aluminum Cradle construction zlp 800 Building Facade Wall Clearning 7.5m Platform Length

Basic Information

Place of Origin: China

Brand Name: HYCM or others

Certification: ISO,CE

Model Number: ZLP800 Platform

• Minimum Order Quantity: 1 set

• Price: \$2800-3690 per set

• Packaging Details: Pallet per set. LCL or 20'GP, 40'HC

container per set ZLP800 Suspended

Platform

• Delivery Time: 7-10 days

Payment Terms: Western Union, L/C, T/T

Supply Ability: 50 sets per month



Product Specification

• Condition: 100% New

• For: Load Passengers To Work

• Type: Electric Scaffolding

Load: 800kg
 Working Height: 100-200m
 Rated Speed: 8-10 M/min

• Power: 380v /50Hz Or Others

Motor Power: 2*1.8 KwWire Rope: 8.6mmPlatform Length: 7.5m

• Highlight: Aluminum Cradle suspended work platform,

ZLP 800 building facade platform, 7.5m length wall cleaning platform



More Images



Product Description

Aluminum Cradle construction zlp 800 Building Facade Wall Clearning 7.5m Platform Length

Introduction:

1m, 2m, 3m, 1.5m, 2.5m to the length made. In any Combination Rated Load: 800KG Rated Lifting Speed: 8-10m/min

Length of Platform: 7500mm or others

Surface Proceeding: Steel materials(Galvanized,Spraying) or Aluminum

Lifting Height: 100-200m Cable: 100-200m

Max Lifting Height:100-200m Steel Rope: 8.6mm or 9.1mm Hoist Power: 1.8KW*2

Voltage:380V, 50HZ, Three-Phase(standard), 440V/60HZ, 220V/60Hz or others.

Safety Lock Permission Force of Impact: 30KN

Locking Cable Angle: 3°~ 8°

Suspension Mechanism Front Beam Overhang: 1.3 ~ 1.5m ±0.26

Support Adjustable Height: 1.44 ~ 2.14m ±0.26

Counter Weight: 1000KG or others Package: Pallet or Naked by Containers

Applications

- 1. Cleaning and maintaining of the exterior wall of high-rise building.
- 2. Painting, decoration and refurbishing of exterior walls.
- 3. Installation projects and other construction working of outer walls of high-rise building.
- 4. Aerial working of ship, large tower, bridge, dams and large chimneys.
- 5. Install and maintain for high-rise building elevator hoistway, shipbuilding industry, seagoing vessel, warships welding maintain.

Specification

Model		ZLP800 Suspended Working Platform
Rated load(kg)		800
Lifting speed(m/min)		8-10
Motor power(kw)		2×1.8 50HZ/60HZ
Brake torque(Km)		15.2
problem ground range ()		3°- 8°
Distance between two steel rope(mm)		≤100
Rated stretch of front beam(mm)		1100-1700
ISTIGNANTING	Locking	Steel
	Nr. of platform rack	Single rack
	Nr. of platform	3
	L×W×H(mm)	(2500×3)×690×1180
	Weight(kg)	217
Suspending mechanism(kg)		2×175 Kg
Counterweight(kg) optional		25×40pcs
Diameter of steel rope(mm)		8.6
Voltage(v) 3PHASES		220V/380V/415V (customized)

Features

- 1.Our suspended working platform can be widely used parapet and complicated building in different height. And we can also supply customized platform to meet different requirements from customers.
- 2. Suspension power Working Platform is a temporary, flexible high access equipment for maintenance and construction work. distinguished from permanent access equipment. It can be disassembled conveniently.
- 3. It compared with traditional scaffolding, can save labours and time to maintain the high buildings, such as industry workshop, water tower, bridge, TV tower, big chimney, cenotaph, dam,etc.
- 4. Besides, Suspension Working Platform can be used to lift specific weight.
- 5. Suspension Working Platform is a good helper for construciton and decoration of high buildings.
- 6. ZLP800 suspended platform uses LTD80 hoisting motor. It has electromagnetic brake motor, centrifugal speed limiting device, two steep speed reducer and "a" type rope winding system.
- 7. Hoisting motor can wind rope automatically. Operator only need to insert rope into the motor.





More products available: Construction Machinery **Tower Cranes**

- ---- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.
 ---- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
 ---- D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.

- ---QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

----- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

SS Building Material Lift / Hoist ----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.




Working Platforms ZLP



SJY Scissor Lift



Gantry Crane

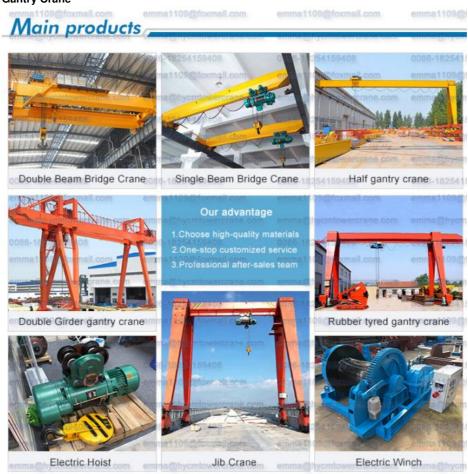

Small Jib Crane





Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane

0086-18254159408

emma1109@foxmail.com



hycmtowercrane.com

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China