



1.0tons Construction Cargo Lifter 24m Lifting Height with Safety Device

Our Product Introduction

for more products please visit us on hycmtowercrane.com


Basic Information

- Place of Origin: China
- Brand Name: HYCM or XINGDAO
- Certification: CE, ISO
- Model Number: SC Building Hoist
- Minimum Order Quantity: 1 set
- Price: \$8850-10200 per set
- Packaging Details: Naked packing, 1*40'HQ containers.
- Delivery Time: 15 days after receiving the deposit
- Payment Terms: Western Union, L/C, T/T
- Supply Ability: 40 sets per month



Product Specification

- Condition: 100% New
- Application: Buildings And Projects
- Type: Wire Rope Climbing
- Max. Load: 1.0tons
- Lifting Height: 24m
- Rated Speed: 22m/min
- Power supply: 380V 50Hz Or According To Client's Requirements
- Motor Power: 5.5kw
- Model: Ss100
- Mast Section Size: 800mm

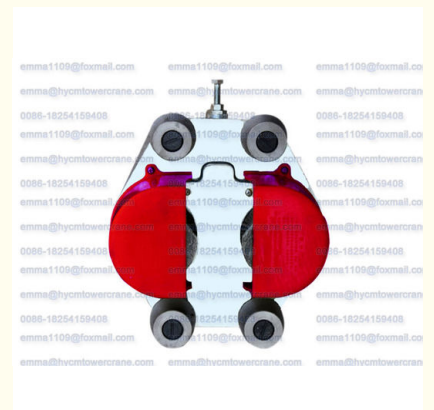

More Images



Product Description

1.0tons Construction Cargo Lifter 24m Lifting Height with Safety Device

Introduction

1. SS100 Material Elevator is widely used in the vertical transport of high-rise and multi-storey construction, mining, workshop materials.
2. The utility model has the advantages of simple structure, quick and easy installation and disassemble, safe and reliable use, economic benefits and high work efficiency.
3. The machine has a single cage and double cage in two forms, users can choose their own needs.

Specification

No.	Item	Unit	Value
1	Height	Freestanding	m
	Max. height	m	24
2	Mast section size	m×m×m	60
3	Cage size	m×m×m	0.8×0.8×1.508
4	Rated load	kg	3×1.3×1.9
5	Rated speed	m/min	1000
6	Motor		22
7	Brake		Y132M-4-5.5KW
8	Wire rope		MZD-- 200
9	Working condition		6*19-11-1750-1
			-20 +40

Distinctive Features

1. Safety protection device is complete and reliable. For safety device with national patent technology, make the machine working reliability among the top of the same products.
 2. Modular design, through different collocation, different speed, different lifting weight can be combined from the elevator specifications. The product standard, practicability and generalization are greatly improved.
 3. Smooth operation and comfort. Because the machine will be top drive unit in the cage, cage net space increases; At the same time also make driving more smoothly, mechanical vibration, brings to the operation staff a comfortable and spacious environment.
- Use this machine is a wise choice, you set the construction lifter can become your modernization construction's right-hand man, for your construction efficiency.

Safety device

1. Overweight protection
2. Phase sequence protection
3. Safety door protection
4. Interlayer protection
5. Motor reverse protection
6. Mechanical anti-roll top protection
7. Sensor failure protection
8. Motor short circuit or overload protection
9. Bell output function
10. Data protection

Introduction of SAS Safety Device:

1. SAS series of anti-fall safety device is installed on the both sides of the cage cross-beam of material wire rope construction hoist, along the rail movements of the automatic anti-fall safety device, When the cage loss of weight falling due to sudden breaking of wire rope.
2. Anti-dropping device can automatically buckle both sides of the guide rail to prevent the cage falling, so as to achieve the purpose of safety.
3. When the wire rope and other repairs cage again after the rise, the anti-dropping device eccentric wheel will automatically unlock the cage, cage resume normal operation.



Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China