

12M Working Jib Inner Climbing Tower Crane 0.5t Tip Load Capacity

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 1 set
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms: Western Union, L/C, T/T
- Supply Ability:



Product Specification

Condition:	100% New	
 Application: 	Buildings And Projects	
• Type:	Mini Inner Climing	
• Tip Load:	0.5t	
 Working Jib: 	12M	
 Height: 	10m	
• Power:	440V/60Hz, 380V/60Hz Or Others	
 Mast section: 	0.55*0.55*1.25m	
After Sale Service:	Engineers Available To Service Overseas	

China HYCM

CE, ISO

QT10 Inner climbing Tower Crane

20 days after receiving the deposit

Naked packing, 40'GP or 40'HQ containers.

\$8900-10600 per set

30 sets per month



More Images





12M Working Jib Inner Climbing Tower Crane 0.5t Tip Load Capacity

Short Parameters

- 1. Model: QT10 Inner Climbing Tower Crane
- 2. Type: fixed and inner climbing
- 3. Jib length: 12m
- 4. Load: 500kg
- 5. Mast Section height: 10m

Specification of Small Internal Climbing Tower Crane

Rated Lifting Moment	10KN.M
Rated Loading Capacity	0.5t
Mast section height	10m
Max. Lifting Height	60m
Span	12m
Hoisting speed	40/20 m/min
Slewing speed	0-0.55 r/min
Power supply	380V/50Hz or others
Power Capacity	5Kw
Electric switch box	Schneider
Mast Section	0.55*0.55*1.25m

Description of Small Internal Climbing Tower Crane

1. QT10 tower crane belong to upper-swing hydraulic inner climbing tower crane with horizontal jib.

2. All kinds of performance parameters and technical items are up to or better than the National Standard.

3. The max radius is 6m. Independent loading-lifting height is 10m. Max. climbing loading-lifting height is 60m. The rated load moment is 10KN.m.

Our Service

If the buyer needs help in the period of fixing, the seller will send one technician to the buyer's place to guide the installation until the crane installation is completed, but no more than 15 working days The buyer is in charge of the visa, round-trip tickets, accommodation.

The buyer shall pay 50-80 US dollars every day to the technician as allowance.


The seller is not responsible for the maintenance of the vulnerable components, but can supply free replacement together with the crane.

If the buyer operates the products confirming to the requirements in the service manual, non-vulnerable parts accrues problem found the manufactory will help buyer mend or change the broken accessories within one year.

The seller is not responsible for any accident or damage to the tower crane caused by user's failure to do regular maintenance or to follow the safety procedures provided in Manual.

We promise that any of your inquiry will be respond in 24 hours!

Produce process of Small Internal Climbing Tower Crane Raw Material - Cutting - Welding - Shot Blasting - Assembling - Painting

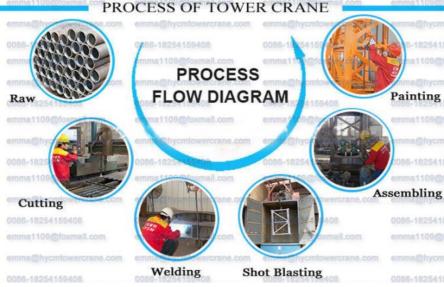

More Photos of Small Internal Climbing Tower Crane

	emman	109@foxit	mail.com
机构特性 Mechanisms specification		emma 1100@fo	kw
085.起升54159408 合 0	m/min 186-18254159408 nma1109@foxmail.com	40 0081-18254159 0.5 empet101@fo	2. 2/3.3
回转 Slewing	nme@hyorr/minercrane	.com (0~0.55° hyomlo	verorane.com, 5 emma@hyc
一章 电源 Power Supply	380V50Hz/440V60Hz	kVA 《供电容量》 Power supply capacity	5 kVA
主要性能参数 Main Specificat	ions		
	0.7t/9m;	起重力矩 Hoisting Moment	100 ^{t.m} d938-18254
起重量 Hoisting Capacity			meil.com emma1109
Hoisting Capacity	nma1109@foxmail.com m 10	e自重1109@fo Self weight	t 2.5

Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane

0086-18254159408

emma1109@foxmail.com

(e) hycmtowercrane.com

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China