




SC Construction Elevator Low Speed Frequency Control Factory Quote

Our Product Introduction

for more products please visit us on hycmtowercrane.com

Basic Information

- Place of Origin: China
- Brand Name: HYCM or XINGDAO
- Certification: CE, ISO
- Model Number: SC Building Hoist
- Minimum Order Quantity: 1 set
- Price: \$23000-33800 per set
- Packaging Details: Naked packing, 1*40'HQ containers.
- Delivery Time: 10 days after receiving the deposit or origin LC
- Payment Terms: Western Union, L/C, T/T
- Supply Ability: 40 sets per month

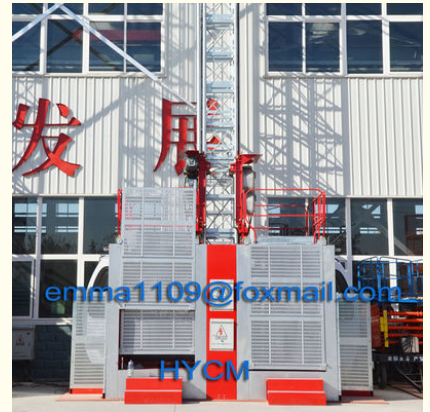

Product Specification

- Condition: 100% New
- Application: Buildings And Projects
- Type: Frequency Control
- Max. Load: 1-4 T
- Max. Height: 150-200 M
- Rated Speed: 0-33 Or 0-40 Or 0-45 M/min
- Power supply: 380V/50Hz Or According To Client's Requirements
- Motor Power: 2*11kw Or 2*3*11 Kw
- Motor Brand: Xingxiang, Sanshang, Juli Or Other
- Mast Section Size: 650*650*1508 Mm



More Images



Product Description

SC Construction Elevator Low Speed Frequency Control Factory Quote

Our construction hoist advantage

1. Cage: Integral style cage, a whole welded steel structure, compact and sturdy. Roller, back wheel ect. own production, bearing for the best domestic bearings, Aluminum peripherals which is light, no vibration, no noise, etc. also can be designed according to customer requirements.
- Cage door: can be designed according to customer requirements into a single, double or ramp type.
2. Motor: Shuang Ma Brand configuration, warranty replacement for 2 years from leave factory date.
- Reducer: CASK Brand Gear box configuration, warranty replacement for 2 years from leave factory date.
3. Anti-fall safety device SAJ40-1.2: Shanghai Construction Institute, the domestic well-known brands
4. Electric: all Schneider, except transformers (Schneider does not produce transformers)
5. Mast section: Robot welding, applicability, 0-450 meters of buildings, flat support is one-time stamping of the U-shaped groove, brace support is 20 solid steel which toughness stronger.
- Rack own production which can be centered or biased install.
6. Paint: automatic electrophoresis paint line

Specification

Specification	Type	Lifting Capacity	Lifting Speed	Motor Power	VFD	Safety device
Single cage without counter weight	SC 100 L	1000Kg	0 40m/min 0 45m/min	2×11Kw 2×13Kw	30Kw	SAJ 30-1.2
	SC 150 L	1500Kg	0 40m/min 0 45m/min	2×13Kw 2×15Kw	30Kw 37Kw	SAJ 40-1.2
	SC 200 L	2000Kg	0 33m/min 0 40m/min 0 45m/min	2×13Kw 3×11Kw 3×13Kw	30Kw 37Kw 45Kw	SAJ 40-1.2
	SC300L	3000Kg×2EA	0 45m/min	3×15Kw×2EA	55Kw×2EA	SAJ 40-1.2
Twin cages without counter weight	SC 100/100 L	1000Kg×2EA	0 40m/min 0 45m/min	2×11Kw×2EA 2×13Kw×2EA	30Kw×2EA	SAJ 30-1.2
	SC 150/150 L	1500Kg×2EA	0 40m/min 0 45m/min	2×13Kw×2EA 2×15Kw×2EA	30Kw×2EA 37Kw×2EA	SAJ 40-1.2
	SC 200/200 L	2000Kg×2EA	0 33m/min 0 40m/min 0 45m/min	2×13Kw×2EA 3×11Kw×2EA 3×13Kw×2EA	30Kw×2EA 37Kw×2EA 45Kw×2EA	SAJ 40-1.2
	SC300/300L	3000Kg×2EA	0 45m/min	3×15Kw×2EA	55Kw×2EA	SAJ 40-1.2

Humanistic Design

1. Newly designed height of the cage (2.46m), which can save freight.
2. Top of the cage is made of a complete high-grade steel, so the waterproof performance is greatly improved.
3. Body of cage is made of mesh steel plate, appearance of which with special spray technology which makes cage more beautiful, can completely against rust and prolong its usage life-span.
4. Door frame is made by light weight steel shape which can make cage more stable.
5. Special embedded counterweight design. More safe and stable in.
6. Improved door handle makes the operation more easily.

Equipment

CNC Plasma cutting machine
Punching machine
Large plate bending machine
Electrophoresis pain production line
Cold forming machine processing line
Robot welding

Picture



Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1, Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China