



CIF Iquique Chile of A Tower Crane 3 or 4 Tons 42m Working Boom Topkit Type

Our Product Introduction

for more products please visit us on hycmtowercrane.com

Basic Information

- Place of Origin: China
- Brand Name: HYCM TOWER CRANE
- Certification: CE, ISO, GOST, CU-TR
- Model Number: QTZ40(4208) Tower Crane
- Minimum Order Quantity: 1
- Price: \$28900-30000 per set
- Packaging Details: Naked packing, 3*40'HQ containers.
- Delivery Time: 30 days after receiving the deposit or origin LC
- Payment Terms: TT, LC
- Supply Ability: 40 sets per month



Product Specification

- Condition: 100% New
- Application: Buildings And Projects
- Type: Topkit
- Max. Load: 3 Or 4 Tons
- Working Boom: 42m
- Tip. Load: 0.8 T
- Power supply: 380V/50Hz, 415V/50Hz, 220V/50Hz Or According To Clients Need
- Mast section: 1.5*1.5*2.2m
- Main Chord: 140*10mm
- After Sale Service: Engineers Available To Service Overseas
- Highlight: **Topkit tower crane 42m working boom,
Tower crane 3 or 4 tons capacity,
CIF Iquique Chile tower crane**



More Images



Product Description

CIF Iquique Chile of A Tower Crane 3 or 4 Tons 42m Working Boom Topkit Type

Shot Pamameter

1. Model: QTZ40(TC4208) Topkit Tower Crane
2. Type: fixed and external climbing
3. jib length:42m
4. tip load:0.8t
5. max.laod: 3 or 4t
- 6.freestanding height: 29m

Description

1. The Fixed Tower crane base fixed to the ground on a concrete foundation
2. The base is then attached to the mast sections which gives the crane its height.
3. Further the mast is attached to the slewing unit that allows the crane to slewing.
4. The horizontal jib (working arm) is the part of the crane that carries the load.
5. The counter-jib carries a counterweight while the jib suspends the load to and from the center of the crane.
6. The crane operator usually stay in the cabin at the top of the tower.
7. The lifting hook is operated by the operator using electric motors to manipulate wire rope cables through a system of sheaves which lift the building materials

Specification


Model	QTZ40 (4208) Tower Crane	
Working Radius (m)	42	
Max. Load Capacity (T)	3 or 4	
Tip Load (T)	0.8	
Freestanding height (m)	29	
Max. Height with anchorages (m)	120	
Mast Section dimension (m)	1.5×1.5×2.2, angle steel 140×10mm	
Hoisting Mechanis	Speed (m/min)	64.15/32.57/7.0, 32.14/15.60/3.5
	Motor power (kw)	15/15
Slewing Mechanism	Speed (r/min)	0.7/0.35
	Motor power (kw)	3.7
Trolleying Mechanism	Speed (m/min)	38.6/25.2
	Motor power (kw)	1.5/2.2
Jacking-up System	Speed (m/min)	0.4
	Motor power (kw)	4
Total Power (kw)	24.9	
Power Supply	380V/50Hz, 415/50Hz, 220V/60Hz, ect	

Advantage

1. 15 years of experience in supplying new tower cranes.
 2. Export to more than 20 countries with CE/ISO/GOST/CU-TR Certificates.
 3. Mobile and internal climbing type tower cranes are also available.
 4. Impeller blasting and rust protection painting with advanced painting process.
 5. Strict and experience welding line
 6. New designed mast, can be used to Internal and external climbing tower crane
 7. Well known brand mechanism system, Schneider Electronic control system, Jjiangte or Jiuhe motor
 8. Engineers available to service machinery overseas.
 9. For warranty: 12 months from the B/L date.
- What's more, some free easy worn spare parts are provided together with the crane.

We accept OEM or redesign according to your detail requirements.

Pictures

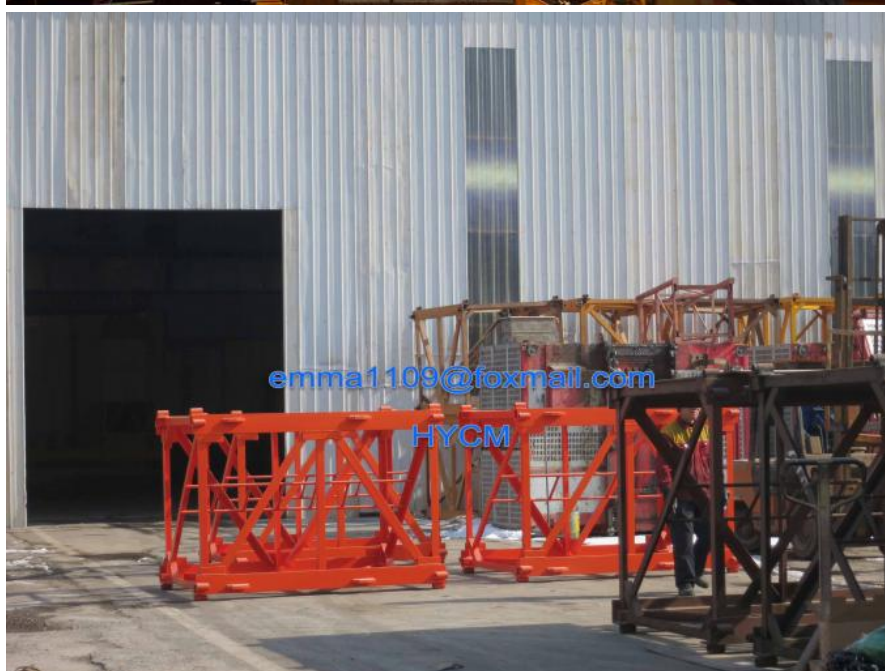

Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1, Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China

