



Spare Parts 650mm Mast Sections of Construction Lifter 1508mm Height

Our Product Introduction

for more products please visit us on hycmtowercrane.com

Basic Information

- Place of Origin: China
- Brand Name: HYCM or others
- Certification: ISO
- Model Number: SC Construction Hoist mast
- Minimum Order Quantity: 20 set
- Price: \$210-400 per set
- Packaging Details: Naked packing, 20'GP and 40'HQ containers.
- Delivery Time: 10 days after receiving the deposit
- Payment Terms: Western Union, T/T
- Supply Ability: 100 sets per month



Product Specification

- Condition: 100% New
- For: Construction Lifter
- Type: Steel Structure
- Color: Yellow, Red Or According To Clients Need
- Size: 650mm
- Height: 1508mm



More Images



Product Description

Spare Parts 650mm Mast Sections of Construction Lifter 1508mm Height

1. Our mast section is in high quality, stability and the structure is in high tension.
2. Our company enjoys very advantageous geographical location and convenient transportation. Welcome to visit our factory at any time!

Application for Construction Hoist of Mast Section

No.	Hoist Model	Cage Number
1	SC50	Single cage
2	SC100	Single cage
3	SC150	Single cage
4	SC200	Single cage
5	SC100/100	Double cage
6	SC150/150	Double cage
7	SC200/200	Double cage

Main materials of Hoist Mast Section

- a. High quality steel plate Q235B bended by special machine: Thickness 5mm
- b. Welded steel tube Q345B (Seamless steel tube 20# is also available): Ø76×4.5mm or Ø89×4.5mm (Thickness of 6mm or 8mm is also available)

Electro-static coating Specifications: 650*650*1508mm or 800*800*1508mm

Being Galvanized Specifications: 650*650*1508mm or 800*800*1508mm

Master Section For Construction Hoist

Model NO.: 650*650*1508mm

Standard: BS

Forming: Cold Drawn Steel

Member: Steel truss

Carbon Structural Steel: Q235, Q345

Application: Building Elevator, Construction hoist for Building Construction Projects

Transport Package: Naked by Containers

Origin: Shandong, China

Connection Form: Bolts Connection

Type of Steel For Building Structure: Fire - Resistant Steel

Customization: Yes

Specification: 650*650*1508mm

About the mast section:

SC series lift standard section offer hot galvanizing process,

Each Section With Four 10.9 Dacromet Process High Strength Bolts, M16*85 High Strength Bolts


This Section Of The Standard Section Is: 650mm, 800mm; Height 1508mm The Price Of The Main Branch Diameter 76mm, 89mm; Thickness Of 4.5mm And 6mm.

After Boring Through a Dedicated CNC Machine Cut, Welded Precision Higher than The National Standard.

Rack Material Is LG60, To Ensure The Rack Quality Superior Than Counterparts.

The Mast Section (Color Is Variable) Is Made Of Seamless Tube Or HF Welded Tube.

Photos

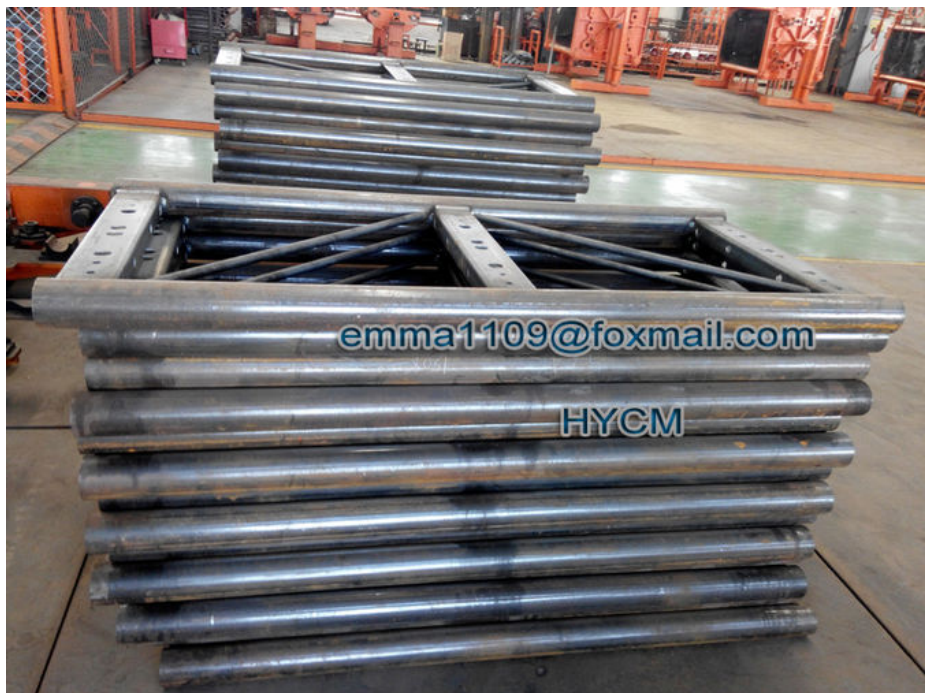

More products available

Tower Cranes

---- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.

---- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.

---D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.

---QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

SC Construction Man and Material Elevator

----- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

SS Building Material Lift / Hoist

----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.

ZLP Suspended Platform

---Most popular model ZLP630, ZLP800: 630KG AND 800KG

□



Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu
District, Jinan City, Shandong Province, China