

New Topless PT6013 HYCM Huiyou Tower Crane Green Eco-friendly colors

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

 Application: 	Buildings And Projects
• Type:	Topless
 Load Capacity: 	6t
• Boom:	60m
• Price:	Exw Fob Cif
 Mast section: 	1.835*1.835*2.5m (Block Type)
• Main Chord:	135*12mm (square Tube)
Colors:	Eco-friendly

China

1

LC

TT, LC

Huiyou TOWER CRANE

CE, ISO, GOST, CU-TR

\$78500-86300 per set

30 sets per month

containers.

PT6013 Topless Tower Crane

Naked packing, 6*40'HQ+1*20'GP

20 days after receiving the deposit or origin



More Images





Product Description

New Topless PT6013 HYCM Huiyou Tower Crane Green Eco-friendly colors

Performance parameters

a. Max. jib length: 60 m b. Max. lifting capacity: 6 t

- c. Tip load: 1.3 t
- d. Max. lifting moment: 1000 KN.M
- e. Max. free-standing height: 45 m
- f. Max. working height of anchored crane: 180 m
- g. Types of tower crane: stationary crane and outside climbing type. Mobile and inner climbing type are available

Specification

opeenedien		
Туре	Topless or Flat top no head	
Max. Lifting Load (t)	6	
Tip Load (t)	1.3	
Max. Lifting Height with anchorage (m)	150	
Free standing height (m)	45	
Rope length (m)	400	
Span (m)	60	
Working range (m)	3 to 60	
Slewing speed (r/min)	0.6	
Trolley peed (m/min)	40/20	
Jacking-up speed (m/min)	0.4	
Counter jib length (m)	15.4	
Power supply	380V/50Hz or according to client's requirements	
Power Capacity (KW)	46.2	
Electric switch box	Schneider	
Hoisting speed (m/min)	(a=2)0-80; (a=4)0-40	
Mast section (m)	1.835*1.835*2.5m or 2*2*3m potain type	

Our advantage

1. 19 years of experience in supplying new external climbing tower crane with HYCM Brand.

2. Export to more than 20 countries with CE/ISO/GOST/CU-TR Certificates.

3. Stationary/Traveling and internal climbing type tower crane are available

4. Impeller blasting/rust protection paint

5. Advanced painting process

- 6. Strict and experience welding line
- 7. New designed mast, can be used to Internal and external climbing tower crane
- 8. Well known brand mechanism system, Schneider Electronic control system, Jjiangte and Jiuhe motor

9. Engineers available to service machinery overseas.

10. For warranty, it is 12 months from the B/L date. What's more, some free easy worn spare parts are provided together with the crane.

Why choose us

- 1. A professional tower crane FACTORY supplier in China with 19 years experience
- 2. Exported to more than 20 countries with ISO9001 & CE & GOST Certifications

3. Hydraulic self-climbing mechanism

- 4. Variable-frequency slewing mechanism
- 5. Varialbe-speed frequency PLC control System
- 6. Operation data display screen and Safety monitoring system (Black Box)

7. Various safety devices

Components

Mast: the main supporting tower of the crane. It is made of steel trussed sections that are connected together during installation.

Slewing unit: the slewing unit sits at the top of the mast. This is the engine that enables the crane to rotate.

Operating cabin: the operating cabin sits just above the slewing unit. It contains the operating controls.

Jib: the jib, or operating arm, extends horizontally from the crane. A "luffing" jib is able to move up and down; a fixed jib has a rolling trolley that runs along the underside to move goods horizontally.


Hook: the hook (or hooks) is used to connect the material to the crane. It hangs at the end of thick steel cables that run along the jib to the motor.

Weights: Large concrete counterweights are mounted toward the rear of the mast, to compensate for the weight of the goods lifted.

Installation Photos

for more products please visit us on hycmtowercrane.com



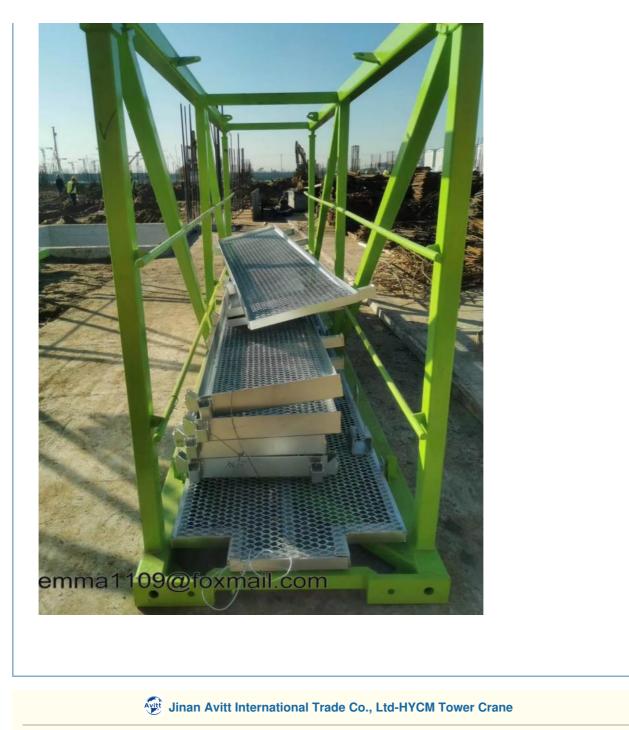

 O086-18254159408 emma1109@foxmail.com
 hycmtowercrane.com
 No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China