




Battery Electric Drive type Self Moving Scissor Lift Working Platform

Our Product Introduction

for more products please visit us on hycmtowercrane.com

Basic Information

- Place of Origin: China
- Brand Name: HYCM, CHUFENG or others
- Certification: ISO, CE
- Model Number: CFPT039ZP self propelled mini Scissor Lift Platform
- Minimum Order Quantity: 1 set
- Price: \$6900-7200 per set
- Packaging Details: Plywood package, LCL or 20'GP, 40'HC container
- Delivery Time: 7-15 days
- Payment Terms: Western Union, L/C, T/T
- Supply Ability: 80 sets per month

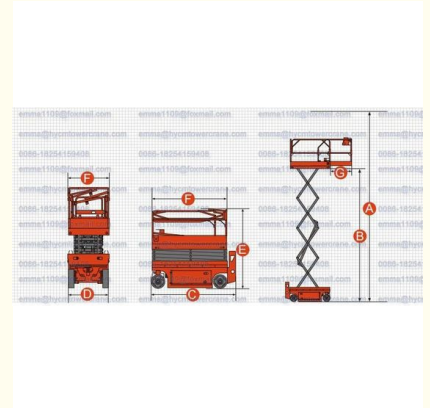

Product Specification

- Condition: 100% New
- Application: Load Passengers To Aerial Work
- Type: With 4 Wheels
- Load: 240kg
- Working Height: 5.9m
- Lifting/Descend Speed: 34/28 Sec
- Lifting Motor/Drive Motor: 24/0.8 V/kw
- Battery: 2x12/105 V/Ah
- Platform Material: High Strength Steel
- Platform Size: 1340x700 Mm
- Color: Orange, blue, Yellow Or Others



More Images



Product Description

Battery Electric Drive type Self Moving Scissor Lift Working Platform

General Introduction of this mini scissor lift platform

1. Load capacity: 240kg
2. Lifting height: 5.9m
3. Applications: aerial installation, maintenance, clean at the construction sites, workshops, warehouse, hotel, airport, wharf, gas station and stadium etc.
4. Custom-made according to the requirement
5. The worker can control the scissor lift on the platform when raised by handle .
6. The worker can also control the lift on the floor by handle control

Specification

Parameter	Unit	CFPT039ZP
Rated Load Capacity	Kg	240
Extended platform load	Kg	105
Max. working height	m	5.8
Max. platform height	m	3.9
Length (L)	mm	1470
Width (W)	mm	760
Height(guardrail unfolded)	mm	2030
Height(guardrail folded)	mm	1730
Platform size	mm	1340x700
Platform extended	mm	600
Ground clearance (Lower)	mm	60
Ground clearance (Raised)	mm	16
Wheel base	mm	1085
Min. Turning radius (inner wheels)	mm	0.4
Min. Turning radius (outer wheels)	mm	1550
Lifting motor/Drive motor	V/Kw	24/0.8
Travel speed(Lower)	Km/h	3.5
Travel speed(Raised)	Km/h	0.5
Lifting/Descend speed	sec	34/28
Battery	V/Ah	2x12/105
Charger	V/A	24/15
Grade ability	%	25
Max. working inclination	.	1.5/ 3
Tyre size	mm	Φ230x80
Overall weight	Kg	890

Standard equipment

Proportional controls
 Self-lock gate on platform
 Extension Platform
 Drivable at full height
 Non marking tyre
 2WD
 Automatic brakes system
 Emergency lowering system
 Emergency stop button
 Tubing explosion-proof system
 Onboard diagnostic system
 Tilt sensor with alarm
 All Motion Alarm
 Horn
 Hour meter
 Safety brackets
 Forklift pockets
 Charger protection
 Flashing beacon
 Folding guardrails
 Automatic pothole protection

Options

Overload sensor with alarm
 AC power on the platform
 Platform work lights
 Airline to the platform
 Platform anti-collision switch

Service

1. All the machines will be full tested before shipment
2. The total machine guarantee is 12 months
3. 24 Hours technical support, email, telephone or video online
4. User-friendly english manual for machine using and maintaining
5. Several sets wearing parts will be free for you

CFPT0392P
自行走迷你剪叉式
高空作业平台
(电驱动)



标准配置 STANDARD CONFIGURATION

- 平台门控制 Platform control
- 紧急下降系统 Emergency descent system
- 安全锁止按钮 Safety lock stop button
- 剪刀结构 Scissor structure
- 平台门控制 Platform control
- 紧急下降系统 Emergency descent system
- 安全锁止按钮 Safety lock stop button
- 剪刀结构 Scissor structure

选配配置 OPTIONAL CONFIGURATION

- 超载保护 Overload protection
- 超载报警系统 Overload alarm system
- 超载保护装置 Overload protection device
- 超载保护装置 Overload protection device

名称参数 NAME PARAMETERS

名称	参数	名称	参数
额定工作载荷	240kg	额定高度	10.85m
额定平台安全工作载荷	100kg	最小转弯半径 (内轮)	0.8m
最大工作人数	2	最小转弯半径 (外轮)	1.55m
最大工作高度	5.8m	额定速度	24v/0.86m/s
最大平台高度	3.5m	额定速度 (空载)	3.56m/h
额定高度	1470mm	额定速度 (带载)	0.56m/h
额定高度	780mm	上升/下降速度	34/20cm/s
额定高度 (带载)	2000mm	额定高度	2412/1054mm
额定高度 (带载)	1750mm	额定高度	24v/0.5A
工作平台尺寸	1340/1000mm	最大爬坡能力	25%
平台结构尺寸	800mm	工作最大净高度	1.57m
最小转弯半径 (带载)	400mm	额定高度	92/1080mm
最小转弯半径 (带载)	16mm	额定高度	890kg

Platform control handle and panel
Operating on the platform no matter on the ground or in the lifting state

Scissor structure
High strength Q345 manganese steel

Platform control and emergency stop button
If power off, man working high can descend safe

Non-marking solid tyre
Environmental and low noise

Anti-skid ladder
Safe for man to climb

RELATED PRODUCTS



More products available:

Tower Cranes

- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.
- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
- D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

SC Construction Man and Material Elevator

----- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

SS Building Material Lift / Hoist

----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.

ZLP Suspended Platform

---Most popular model ZLP630, ZLP800: 630KG AND 800KG

□□□



Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China