

3T Mini Tower Cranes Fast Self-Installation for Lift Building Materials

Basic Information

• Place of Origin: China

• Brand Name: HYCM or others

Certification: ISO,CE

Model Number: YT2527-30 SELF-ERECTING INTELLIGENT

TOWER CRANE

Minimum Order Quantity: 1 set

• Price: \$51000-56000 per set

• Packaging Details: naked 40'HC or 45'HC container

Delivery Time: 10-20 days

Payment Terms: Western Union, L/C, T/T

• Supply Ability: 30 sets per month



Product Specification

• Condition: 100% New

• Application: Building Construction

• Type: Fast Self-Installation Tower Crane

Load: 3 TonWorking Height: 23mBoom: 27m

Power Supply: 380V/50Hz Or Others
 Platform Material: High Strength Steel
 Color: Yellow Or Others
 Transport: With Mobile Wheels



More Images



Product Description

3T Mini Tower Cranes Fast Self-Installation for Lift Building Materials

General Introduction of this Self Erecting tower crane

Fast-erecting cranes are transported on the road as complete units ready for use.

Thanks to their short wheelbase and compact slewing platform design, they can be maneuvered easily on tight construction sites.

The benefits of fast-erecting cranes include the rapid erection and versatility in use.

This means that these cranes can be used to build detached and multi-occupancy houses as well as small infrastructure projects.

The flexible tower crane refers to the installation, erection, or disassembly and transshipment very conveniently. The loading and dismantling process can be carried out by its own mechanism without the use of an external crane type, which can be completed in 1~2 hours or so

It is suitable for the construction of low and single building. It has the characteristics of loading, erection, safety, shortcut, high efficiency, low cost and little damage to the site.

Specification of this Self Erecting tower crane


Specification		Unit	YT2527-30
Max. height		m	25
Max.load		t	3
Working range		m	6-27
Hoisting parameters	Max.hoisting height	m	25
	Max.working radius	m	27
	Max.hoisting weight	Kg	3000
	Hoisting speed	m/min	13/26
	Trolleying speed	m/min	20/40
	Slewing speed	r/min	0.25/0.8
	Erecting time	min	10
	Outrigger span	m	4.2x4.2
	Dead weight	Kg	26000
Travel	3 - 1- 3	Km/h	15
parameters			
Hydraulic system	, ,	Мра	28
Power supply	Rated Power	Kw	23.1

Features

- 1. High performance, simplicity and stability
- 2. Good adaptability of the site
- 3. Low cost with power operation, Safe & environment protecting, Low noise
- 4. Remote control with variable speed driving
- 5. Multilayer safety protection to guarantee the safety and Reliability
- 6. Quick extension arm, no preset foundation and professional installation.

Service

- 1. All the machines will be full tested before shipment
- 2. The total machine guarantee is 12 moths
- 3. 24 Hours technical support, email, telephone or video online
- 4. User-friendly english manual for machine using and maintaining
- 5. Sereral sets wearing parts will be free for you

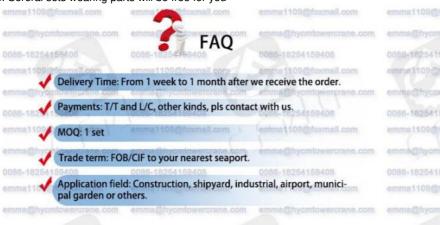



Loading of this erecting tower crane





More products available:

Tower Cranes

- ---- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.
 ---- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
- ---D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- ---QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

SC Construction Man and Material Elevator

----- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

SS Building Material Lift / Hoist

----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.

ZLP Suspended Platform

---Most popular model ZLP630, ZLP800: 630KG AND 800KG





0086-18254159408

emma1109@foxmail.com

hycmtowercrane.com

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China