

Tower Crane Part Wireless Radio Remote Control System F24-60 Models

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:

China

Telecrane


ISO, CE


F24-60

1 set

Carton

• Supply Ability:





Product Specification

- Condition:
- Application:
- Material:
- Color:
- Protection Level:
- Shell Material:
- Control Distance:
- Voltage:

100% New **Tower Cranes** Plastic And Silicone Black Orange IP65 PA6(30%GF) 100M

AC36V, AC220V, AC380V



More Images



Tower Crane Part Wireless Radio Remote Control System F24-60 Models

Desctription:

F24-60 has extraordinary communication design-simultaneous encoding and decoding transmission, interference elimination, error detection and correction, and frequency resettable manually.

F24-60 has large amounts of programmable functions and is extensible using Windows compatible software with free update Functions are all programmable .

Features:

- · Up to 40 control contacts.
- · With battery voltage warning device, the power supply is cut off during low power.
- \cdot Safety switch key is to prevent from unauthorized user.
- · Program the button function by computer interface.
- \cdot Start key can be programmed to start, toggle switch, normal or other functions.
- The spare buttons can be programmed to start, toggle, interlock or normal, etc Installed with proportional module for analog signal output (optional)

Basic information:

Up to 100m
40
CE, FCC, ISO9001
Over 4.3billon unique ID codes .
-35°C+80°C
IP65
DC 6V
AC380v/220V/110v/48v/36v/24vor
AC/DC12V
Full sealed relay output with 5
amperes
VHF 312-331MHz.
0-10v


F24-60 Transmitter Parameters	
Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310-331MHz (UHF: 425-446MHz is optional)
Transmitter power	≤10dBm
Transmitter power supply	2 AA alkaline batteries (not included)
Safety code	32 bits (4.3billion)
Temperature range	-40 -+85
Control distance	Approx 100m(200 meters is customized)
Size	210x152x128mm
Weight	980g (without battery)
F24-60 Receiver Parameters	
Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310-331MHz; UHF: 425-446MHz
Receiver sensitivity	-110dBm
Receiver power supply	18~65V AC/DC; 65~440V AC/DC (optional)
Safety code	32 bits (4.3billion)
Temperature range	-40 -+85
Output contactor	8A sealed relay output (with AC 250V/10A relays,
capacity	10A fuse)
Cable length	1.65m (Other length can be customized)
Size	320x253x107mm
Weight	2020g

Products Application:

F24-60 Dual joystick remote control mainly used on tower crane, overhead cranes, concrete pumps truck or others condition which are much more complex.



OTHER REMOTE CONTROLLER

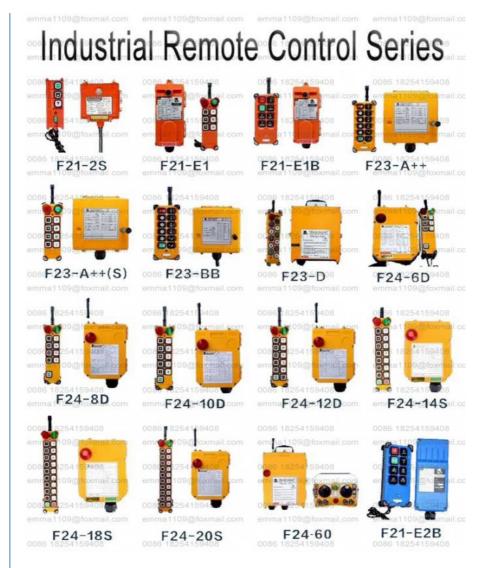

More products available:

Tower Cranes

---- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.

---- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.

- ---D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- ---QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

SC Construction Man and Material Elevator

----- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m.

SS Building Material Lift / Hoist

----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.

ZLP Suspended Platform

---Most popular model ZLP630, ZLP800: 630KG AND 800KG



👾 Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane

O086-18254159408 🛛 🔄 emma1109@foxmail.com

bycmtowercrane.com

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China