



F24-60 Model Industrial Crane Joystick Remote Controller Factory Cost

Our Product Introduction

for more products please visit us on hycmtowercrane.com


Basic Information

- Place of Origin: China
- Brand Name: Telecrane
- Certification: ISO, CE
- Model Number: F24-60
- Minimum Order Quantity: 1 set
- Price: \$500-1000 per set
- Packaging Details: Carton
- Delivery Time: 1-5 days after receiving the deposit
- Payment Terms: Western Union, L/C, T/T, MoneyGram
- Supply Ability: 100000 Piece/Pieces per Year



Product Specification

- Condition: 100% New
- Application: Tower Cranes
- Material: Plastic And Silicone
- Color: Black Orange
- Protection Level: IP65
- Shell Material: PA6(30%GF)
- Control Distance: 100M
- Voltage: AC36V, AC220V, AC380V
- Highlight: **Industrial Crane Joystick Remote Controller, construction crane parts Factory, construction tower crane parts**

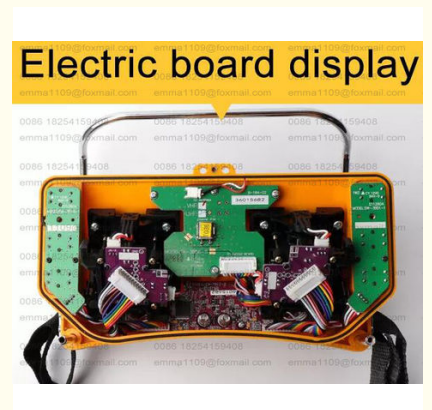

More Images



Product Description

F24-60 Modle Industrial Crane Joystick Remote Controller Factory Cost

Description:

F24-60 has extraordinary communication design-simultaneous encoding and decoding transmission, interference elimination,error detection and correction, and frequency resettable manually.

F24-60 has large amounts of programmable functions and is extensible using Windows compatible software with free update Functions are all programmable .

Features:

- Up to 40 control contacts.
- With battery voltage warning device, the power supply is cut off during low power.
- Safety switch key is to prevent from unauthorized user.
- Program the button function by computer interface.
- Start key can be programmed to start, toggle switch, normal or other functions.
- The spare buttons can be programmed to start, toggle, interlock or normal, etc Installed with proportional module for analog signal output (optional)

Basic information:

Control distance	Up to 100m
Control point	40
Certificates	CE, FCC, ISO9001
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C ___ +80°C
Enclosure protection class	IP65
Transmitter power	DC 6V
Receiver power	AC380v/220V/110v/48v/36v/24vor AC/DC12V
Output capacity	Full sealed relay output with 5 amperes
Frequency	VHF 312-331MHz.
Radio output	0-10v

F24-60 Transmitter Parameters

Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310-331MHz (UHF: 425-446MHz is optional)
Transmitter power	≤10dBm
Transmitter power supply	2 AA alkaline batteries (not included)
Safety code	32 bits (4.3billion)
Temperature range	-40 --+85
Control distance	Approx 100m(200 meters is customized)
Size	210x152x128mm
Weight	980g (without battery)

F24-60 Receiver Parameters

Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310-331MHz; UHF: 425-446MHz
Receiver sensitivity	-110dBm
Receiver power supply	18~65V AC/DC; 65~440V AC/DC (optional)
Safety code	32 bits (4.3billion)
Temperature range	-40 --+85
Output contactor capacity	8A sealed relay output (with AC 250V/10A relays, 10A fuse)
Cable length	1.65m (Other length can be customized)
Size	320x253x107mm
Weight	2020g

Products Application:

F24-60 Dual joystick remote control mainly used on tower crane, overhead cranes, concrete pumps truck or others condition which are much more complex.



emma1109@foxmail.com emma1109@foxmail.com emma1109@foxmail.com



1. Rugged transmitter button: The transmitter button can be pressed for 2 million times and is absolutely durable.

2. The receiver automatically searches for the transmitter channel function; automatic wireless pairing, replacing the transmitter without professional equipment pairing.



6. Super waterproof and oil-proof grade: launch and receive external rafts fully comply with IP66/NEMA4 international specifications.

3. Use advanced processor with multi-bit Hamming code; fast, high security, high precision and 100% error-free coding and decoding.




5. Reinforced fiber plastic housing: Rugged attachment to the receiver housing to prevent damage from strong impact and frequent drops.

4. Extraordinary communication design, synchronous code data transmission, with software to eliminate interference.


emma1109@foxmail.com emma1109@foxmail.com emma1109@foxmail.com



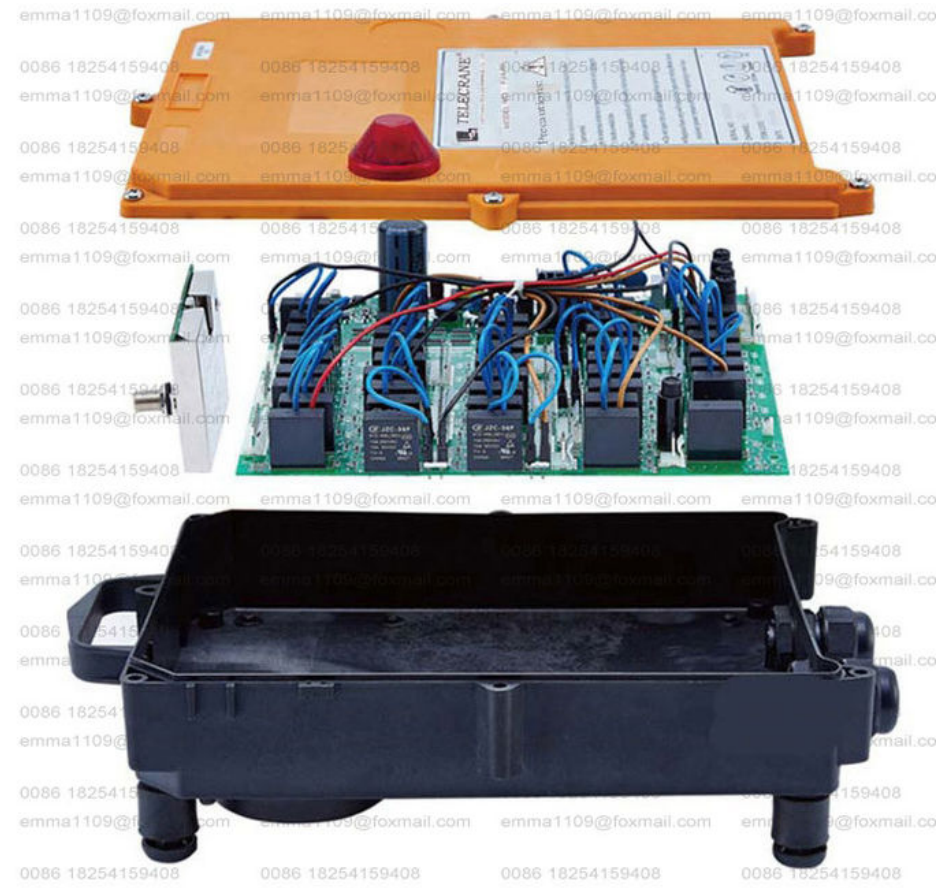

OTHER REMOTE CONTROLLER

Industrial Remote Control Series

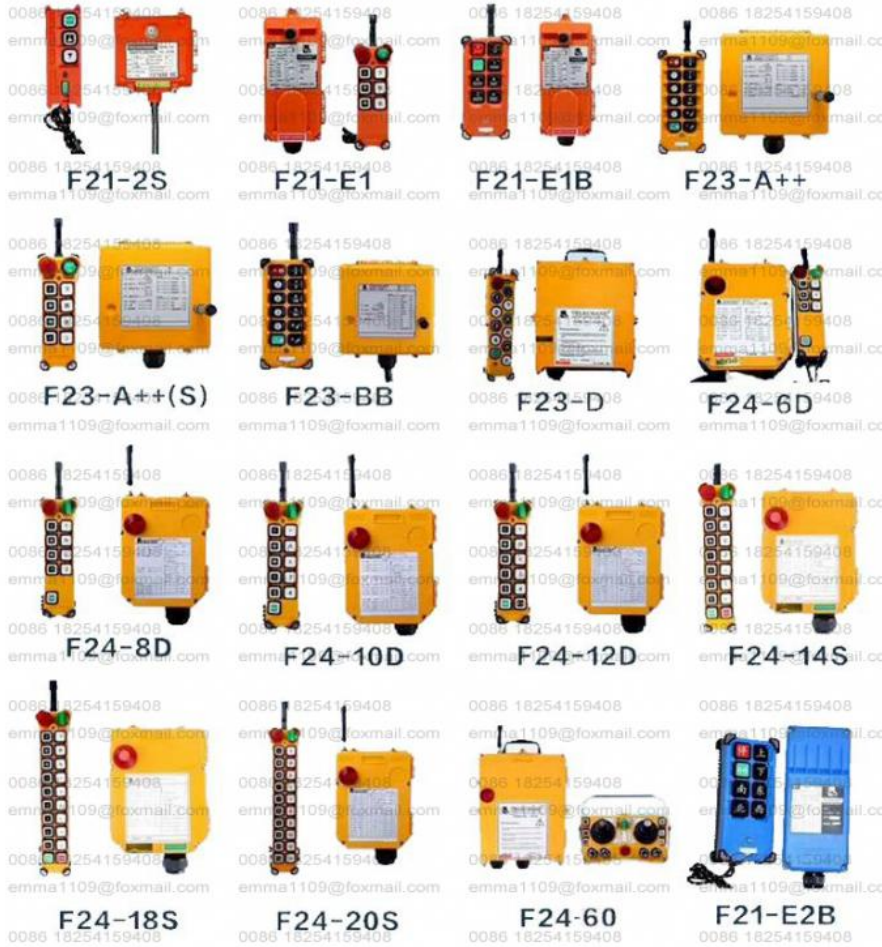

More products available:

Tower Cranes

- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.
- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
- D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

SC Construction Man and Material Elevator

- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

SS Building Material Lift / Hoist

- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.

ZLP Suspended Platform

- Most popular model ZLP630, ZLP800: 630KG AND 800KG



Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1, Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China