



220V/380V F24-60 Waterproof Industrial Radio Remote Joystick Control

Our Product Introduction

for more products please visit us on hycmtowercrane.com


Basic Information

- Place of Origin: China
- Brand Name: Telecrane
- Certification: ISO, CE
- Model Number: F24-60
- Minimum Order Quantity: 1 set
- Price: \$500-1000 per set
- Packaging Details: Carton
- Delivery Time: 1-5 days after receiving the deposit
- Payment Terms: Western Union, L/C, T/T, MoneyGram
- Supply Ability: 100000 Piece/Pieces per Year






Product Specification

- Condition: 100% New
- Application: Tower Cranes
- Material: Plastic And Silicone
- Color: Black Orange
- Protection Level: IP65
- Shell Material: PA6(30%GF)
- Control Distance: 100M
- Voltage: AC36V, AC220V, AC380V

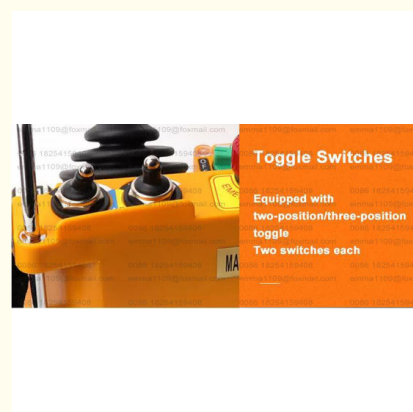

More Images



Product Description

220V/380V F24-60 Waterproof Industrial Radio Remote Joystick Control

Description:

F24-60 has extraordinary communication design-simultaneous encoding and decoding transmission, interference elimination,error detection and correction, and frequency resettable manually.

F24-60 has large amounts of programmable functions and is extensible using Windows compatible software with free update Functions are all programmable .

Features:

- Up to 40 control contacts.
- With battery voltage warning device, the power supply is cut off during low power.
- Safety switch key is to prevent from unauthorized user.
- Program the button function by computer interface.
- Start key can be programmed to start, toggle switch, normal or other functions.
- The spare buttons can be programmed to start, toggle, interlock or normal, etc Installed with proportional module for analog signal output (optional)

Basic information:

Control distance	Up to 100m
Control point	40
Certificates	CE, FCC, ISO9001
Unique code	Over 4.3billion unique ID codes .
Working temperature	-35°C____+80°C
Enclosure protection class	IP65
Transmitter power	DC 6V
Receiver power	AC380v/220V/110v/48v/36v/24vor AC/DC12V
Output capacity	Full sealed relay output with 5 amperes
Frequency	VHF 312-331MHz.
Radio output	0-10v

F24-60 Transmitter Parameters

Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310-331MHz (UHF: 425-446MHz is optional)
Transmitter power	≤10dBm
Transmitter power supply	2 AA alkaline batteries (not included)
Safety code	32 bits (4.3billion)
Temperature range	-40 --+85
Control distance	Approx 100m(200 meters is customized)
Size	210x152x128mm
Weight	980g (without battery)

F24-60 Receiver Parameters

Material	Glass-Fiber PA
Enclosure protection class	IP65
Frequency range	VHF: 310-331MHz; UHF: 425-446MHz
Receiver sensitivity	-110dBm
Receiver power supply	18~65V AC/DC; 65~440V AC/DC (optional)
Safety code	32 bits (4.3billion)
Temperature range	-40 --+85
Output contactor capacity	8A sealed relay output (with AC 250V/10A relays, 10A fuse)
Cable length	1.65m (Other length can be customized)
Size	320x253x107mm
Weight	2020g

Products Application:

F24-60 Dual joystick remote control mainly used on tower crane, overhead cranes, concrete pumps truck or others condition which are much more complex.



emma1109@foxmail.com emma1109@foxmail.com emma1109@foxmail.com



1. Rugged transmitter button: The transmitter button can be pressed for 2 million times and is absolutely durable.

2. The receiver automatically searches for the transmitter channel function; automatic wireless pairing, replacing the transmitter without professional equipment pairing.



6. Super waterproof and oil proof grade: launch and receive external rafts fully comply with IP66/NEMA4 international specifications.


3. Use advanced processor with multi-bit Hamming code; fast, high security, high precision and 100% error-free coding and decoding.



5. Reinforced fiber plastic housing: Rugged attachment to the receiver housing to prevent damage from strong impact and frequent drops.


4. Extraordinary communication design, synchronous codec data transmission, with software to eliminate interference.



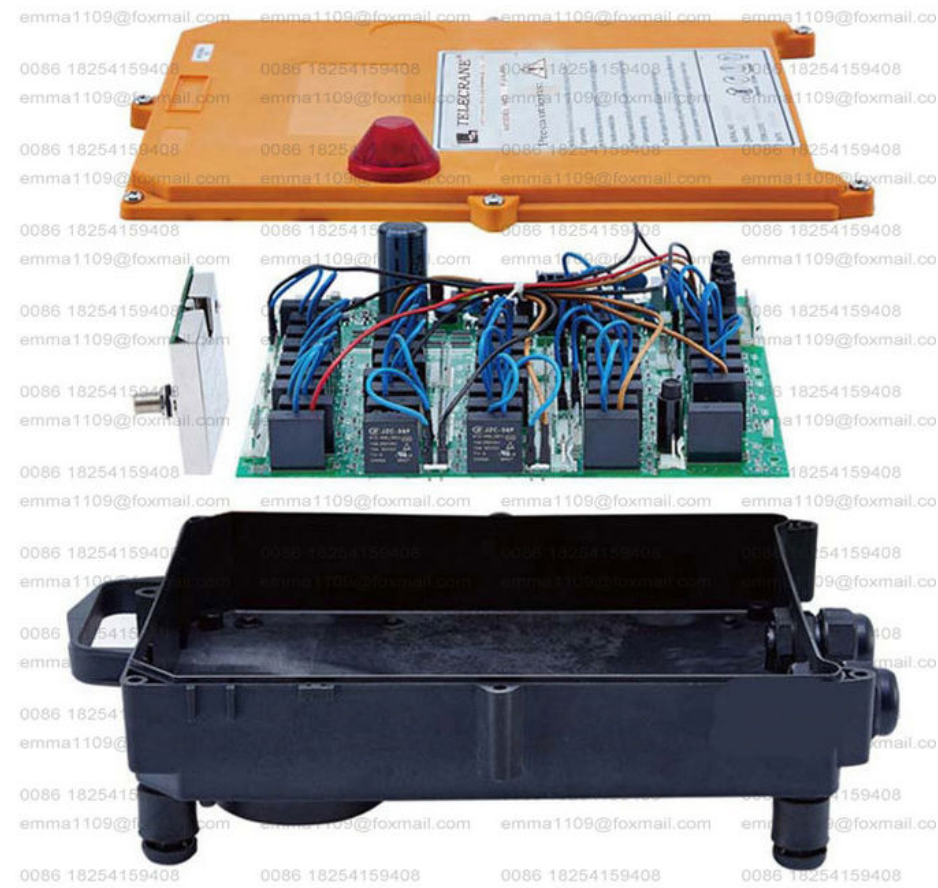

OTHER REMOTE CONTROLLER

Industrial Remote Control Series

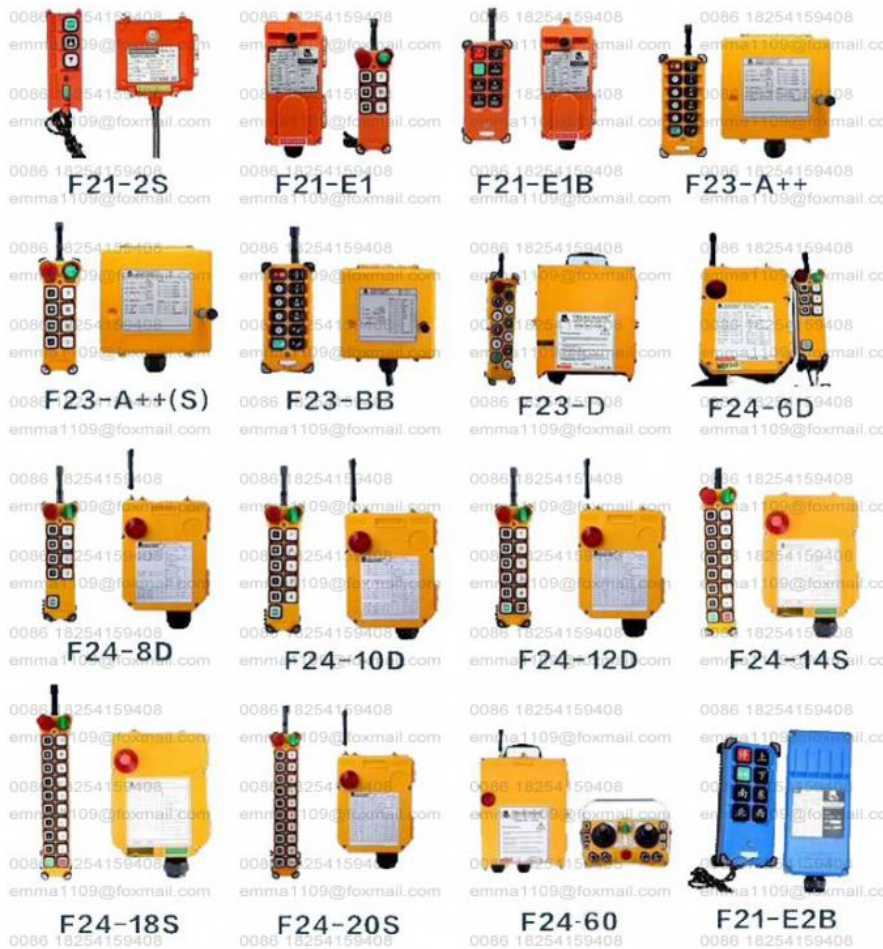

More products available:

Tower Cranes

- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.
- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
- D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

SC Construction Man and Material Elevator

- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

SS Building Material Lift / Hoist

- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.

ZLP Suspended Platform

- Most popular model ZLP630, ZLP800: 630KG AND 800KG



Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China