



8.6mm Galvanized Steel Wire Rope For ZLP800 Construction Suspended Cradle

Our Product Introduction

for more products please visit us on hycmtowercrane.com

Basic Information

- Place of Origin: China
- Brand Name: HYCM AVITT or others
- Certification: ISO,CE
- Model Number: ZLP800 Construction Suspended Cradle
- Minimum Order Quantity: 1000m
- Price: \$0.5-\$2 per meter
- Packaging Details: COIL/REEL/SPOOL EXPORT WOODEN CASE by LCL container or by air
- Delivery Time: 5-10 days
- Payment Terms: Western Union, T/T, MoneyGram
- Supply Ability: 100000 Ton/Tons per Month




Product Specification

- Condition: 100% New
- For: ZLP800 Construction Suspended Cradle
- Type: Hot Galvanized
- Material: High-carbon Steel
- Wire Rope: 8.3mm
- Highlight: **Suspended Platform Galvanized Steel Wire Rope**
, ZLP800 Galvanized Steel Wire Rope,
Suspended Cradle Galvanized Steel Wire Rope



More Images



Product Description

8.6mm Galvanized Steel Wire Rope for ZLP800 Construction Suspended Cradle

Introduction:

Steel Grade: 60# 65# 70# 72# 80#

Standard: ASTM

Place of Origin: China

Application: all kinds lift machiney

Alloy Or Not: Non-Alloy

Special Use: Free Cutting Steel

Model Number: 5X26

Tolerance: $\pm 1\%$

Processing Service: Bending, Welding, Cutting

Grade: galvanized

Delivery Time: 5-30 days

Wire Gauge: 8.6MM

Surface: galvanized

Tensile strength: 1960mpa

MOQ: 1000meter

usage: hanging basket/suspended cradle

Specification for ZLP Suspended Platform

Model	ZLP250	ZLP500	ZLP630	ZLP800	ZLP1000
Rated load	250kg	500Kg	630Kg	800Kg	1000Kg
Lifting speed	12m/min	8-10m/min	8-10m/min	8-10m/min	8-10m/min
Platform Dimension L×W×H(mm)	500	5000(2+3m) ×690×1180	6000(1+2+3m) ×690×1180	7500(2.5m*3) ×690×1180	7500(2.5m*3) ×690×1180
Lifting Height	30 m	100 m	100 m	100 m	100m
Cable	30 m	100 m	100 m	100 m	100m
Steel rope	Φ8.3mm	Φ8.3mm	Φ8.3mm	Φ9.1mm	Φ8.6mm
Hoist Power	1.5KW	1.5KW*2	1.5KW*2	1.8KW*2	2.2 KW*2
Safety lock Force	30KN	30KN	30KN	30KN	30KN
Suspension mechanism Of Front beam overhang		1.3~1.5m	1.3~1.5m	1.3~1.5m	1.3~1.5m
Self weight	48KG	770KG	810kg	870kg	900KG
Power Supply	220V/50Hz, 2P, 380V/50Hz, 3P or clients request				

- 1). **Type** : Steel wire rope
- 2). **Grade** : Carbon steel 70#, 72#, 60#, 45#
- 3). **Standard** : AISI, ASTM, GB, DIN, JIS
- 4). **Surface** : galvanized
- 5). **Diameter** : 8.3mm or as per your requirements
- 6). **Construction** : 5X26
- 7). **Core** : FC
- 8). **Length** : 500m/reel, 1000m/reel, 1500m/reel, 2000m/reel etc
- 9). **Packing** : Wrapped with plywood reel then put on pallets
- 10). **Payment Term** : T/T etc
- 11). **Loading Port** : Shanghai China
- 12). **Delivery Term** : EXW, FOB, CFR, CIF
- 13). **Quality Assurance** : Mill Test Certificate is supplied with shipment, ISO, SGS
- 14). **MOQ** : 1000meter
- 15). **Delivery Time** : Within 10 days after receiving deposit
- 16). **Certification** : ISO, SGS etc
- 18). **Lay** : RHOL, RHLL, LHOL, LHLL
- 19). **Nominal Tensile Strength(Mpa)** : 1770,1960,2160




热卖产品展示

HOT PRODUCTS DISPLAY



材质优良

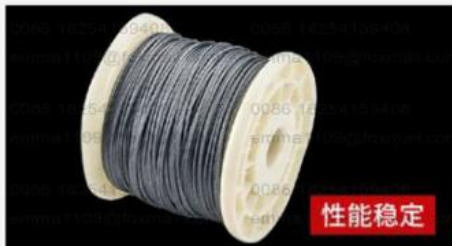

性能稳定



多种规格



品质可靠



用途广泛

Other Spare parts



1. Our suspended working platform can be widely used parapet and complicated building in different height. And we can also supply customized platform to meet different requirements from customers.
2. Suspension power Working Platform is a temporary, flexible high access equipment for maintenance and construction work. distinguished from permanent access equipment. It can be disassembled conveniently.
3. It compared with traditional scaffolding, can save labours and time to maintain the high buildings, such as industry workshop, water tower, bridge, TV tower, big chimney, cenotaph, dam, etc.
4. Besides, Suspension Working Platform can be used to lift specific weight.
5. Suspension Working Platform is a good helper for construction and decoration of high buildings.



More products available:

Tower Cranes

- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.
- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
- D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

SC Construction Man and Material Elevator

- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

SS Building Material Lift / Hoist

----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.



SJY Scissor Lift



Gantry Crane



Double Beam Bridge Crane



Single Beam Bridge Crane



Half gantry crane



Double Girder gantry crane



- Our advantage**
1. Choose high-quality materials
 2. One-stop customized service
 3. Professional after-sales team



Rubber tyred gantry crane



Electric Hoist



Jib Crane



Electric Winch

Small Jib Crane



Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1, Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China