



1t Mini 17m Lifting Height 20m Jib Hydraulic Self Rise Crane Tower for Rural Housing

Our Product Introduction

for more products please visit us on hycmtowercrane.com

Basic Information

- Place of Origin: China
- Brand Name: HYCM, AVITT or OEM
- Certification: CE, ISO, GOST, CU-TR
- Model Number: YT1720 Self erecting Tower Cranes
- Minimum Order Quantity: 1 set
- Price: \$26000-39000 per set
- Packaging Details: Naked packing, 1*40'HC containers.
- Delivery Time: 30 days after receiving the deposit
- Payment Terms: Western Union, L/C, T/T
- Supply Ability: 40 sets per month




Product Specification

- Condition: 100% New
- Application: Rural Housing
- Type: Mini Self Rise
- Max. Load: 1t
- Jib Length: 20m
- Tip Load: 0.9t
- Power supply: 380V/50Hz, 415V/50Hz, 220V/60Hz Or According To Clients Need
- After Sale Service: Engineers Available To Service Overseas
- Color: Yellow Or According To Clients Need



More Images



Product Description

1t Mini 17m Lifting Height 20m Jib Hydraulic Self Rise Crane Tower for Rural Housing

Short Parameters:

1. YT1720 Mobile Mini Self rising Tower Crane
2. Type: mobile and self-erection
3. jib length: 20m
4. max.laod: 1t
- 5.height: 17m

Description

The self erecting tower crane as a whole transport, quickly set up the vertical, horizontal transport machinery.

Mainly suitable for 1 to 5 layers civil construction buildings.

In addition, it can also be used all kinds of factories, garages, stations, terminals, etc. of cargo handling and stacking, and also serves as liquidity lifting transport machinery.

Specifications

Specification		Unit	YT1720-10
Max. height		m	17
Max.load		t	1
Working range		m	6-20
Hoisting parameters	Max.hoisting height	m	17
	Max.working radius	m	20
	Max.hoisting weight	Kg	1000
	Hoisting speed	m/min	16/26
	Trolleying speed	m/min	19
	Slewing speed	r/min	0.8
	Erecting time	min	6
	Outrigger span	m	3.5x3.5
	Dead weight	Kg	14500
Travel parameters			
		Max.towing speed	Km/h 15
Hydraulic system		Hydraulic system	Mpa 28
Power supply		Rated Power	Kw 11.4

Advantages of self erecting tower crane:

- 1.Without foundation, saving construction cost, low requirement for site conditions.
 - 2.Erecting and starting rapidly.
 - 3.None working on the high level during erecting and dismounting.
 - 4.Mast locked automatically, jib sections connected automatically in the air.
 - 5.No require professional operator,operating simply, mastering easily.
 - 6.Wireless remote operating,reducing working labor strength,having wide operating view.
- Transporting wholly.

Why choose us

1. A professional tower crane supplier in China with 15 years experience
2. Exported to more than 20 countries with ISO9001 & CE & GOST Certifications
3. Hydraulic self-climbing mechanism
4. Variable-frequency slewing mechanism
5. Variabe-speed frequency PLC control System
6. Operation data display screen and Safety monitoring system (Black Box)
7. Various safety devices


Pictures

YT快速架设移动塔式起重机

YT Self-erecting Intelligent Tower Crane

主要技术参数 / main technical specifications

类别Category	项目Item	单位Unit	YT1720-10	YT2527-20	YT2527-30	
起重作业参数 Hoisting parameters	起升最大高度 Max.hoisting height	m	17	25	25	
	最大工作幅度 Max.working radius	m	20	27	27	
	最大起重量 Max.hoisting weight	Kg	1000	2000	3000	
	起升速度 Hoisting speed	m/min	16/26	13/26	13/26	
	变幅速度 Trolleying speed	m/min	19	20/40	20/40	
	回转速度 Slewing speed	r/min	0.8	0.25/0.8	0.25/0.8	
	架设时间 Erecting time	min	6	10	10	
	支腿跨距 Outrigger span	m	3.5X3.5	4.2X4.2	4.2X4.2	
行驶参数 Travel parameters	整机总重 Dead weight	Kg	14500	26000	32000	
	最大推行速度 Max.towing speed	Km/h	15	15	15	
液压系统 Hydraulic system	液压系统工作压力 Hydraulic system	MPa	28	28	28	
电源 Power supply	总功率 Rated Power	KW	11.4	23.1	23.1	
	电源 Power supply	380V/50Hz				
起重性能表 Hoisting performance table	YT 1720-10	幅度Radius(m)	10	12	14	19
		起重量 (Kg) Hoisting weight	1000	800	700	600
	YT 2527-20	幅度Radius(m)	10	12.5	15	27
		起重量 (Kg) Hoisting weight	2000	1600	1300	1000
	YT 2527-30	幅度Radius(m)	10	12	15	27
		起重量 (Kg) Hoisting weight	3000	2000	1500	1200

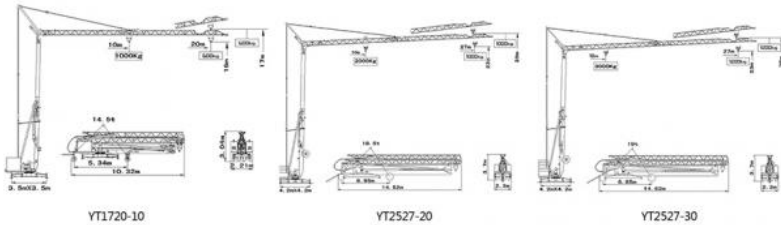

本印刷品所包含的数据，会随着产品的不断升级而改变，请以实际产品为准





More products available: Construction Machinery

Tower Cranes

- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.
- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
- D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

□

SC Construction Man and Material Elevator

- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

□

SS Building Material Lift / Hoist

- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.



Working Platforms ZLP



SJY Scissor Lift



Gantry Crane

emma1109@foxmail.com emma1109@foxmail.com emma1109@foxmail.com emma1109@foxmail.com
Main products



Double Beam Bridge Crane




Single Beam Bridge Crane



Half gantry crane



Double Girder gantry crane



Our advantage

1. Choose high-quality materials
2. One-stop customized service
3. Professional after-sales team



Rubber tyred gantry crane



Electric Hoist



Jib Crane



Electric Winch

Small Jib Crane



Any inquiries or need any help, just let's know



Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1, Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China