



8mm 8*19S Special Cable Wire Rope With Copper Conductor for window cleaner equipment

Our Product Introduction

for more products please visit us on hycmtowercrane.com

Basic Information


- Place of Origin: China
- Brand Name: Avitt or others
- Certification: ISO
- Model Number: DG-7.0/26 8*19
- Minimum Order Quantity: 500meters
- Price: \$3-50 per meter
- Packaging Details: Reel, Drum, Carton, LCL or FCL 20'GP and 40'HC containers for special wire rope
- Delivery Time: 3-7 days after receiving the deposit
- Payment Terms: Western Union, T/T, MoneyGram
- Supply Ability: 30000 meters per month



emma1109@foxmail.com
0086 18254159408

Product Specification

- Condition: 100% New
- Application: For BMU System Or Other Equipment
- Type: Galvanized, Wire Rope Sling
- Color: Standard Or According To Clients Need
- Diameter: 7mm
- Tensile Strength: 1570mpa ~ 1960mpa
- Surface Treatment: Galvanized Or Ungalvanized
- Highlight: **Spare Parts For Suspended Platform, Suspended Platform Parts, Suspended Platform Accessories**

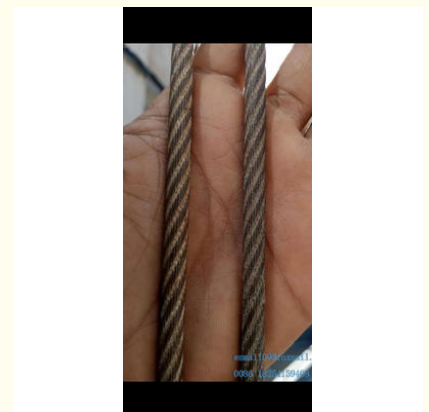

emma1109@foxmail.com
0086 18254159408

More Images



emma11

Product Description

8mm 8*19S Special Cable Wire Rope With Copper Conductor for window cleaner equipment


Description

It is mainly used in window cleaner equipment / BMU system or oil field detection equipment
can also be used in marine engineering, and can also be used for vehicle signal transmission, anti-rat bites, etc.
Special function, characterized by good softness.

Features

Operating temperature: - 50°C ~ + 80°C (design according to requirements);
nominal cross-sectional area of conductor: 0.6mm² ~ 1.5mm² ;
Cable breaking force: 0kN 50kN, can also be designed according to user needs
cable outer diameter: 5mm 16mm.

序号	项 目	单位	DG-7.0/26.0 (2)	DG-7.5/28.0 (2/3)	DG-8.0/30.0 (3)	DG-9.0/40.0 (3)	DG-10.0/52.0 (3)	DG-12.0/75.0 (3)
1	钢丝绳标称直径	mm	7.0±0.2	7.5±0.2	8.0±0.2	9.0±0.2	10.0±0.2	12.0±0.2
2	芯数	芯	2	2 或 3	3	3	3	3
3	单位重量	kg/m	≤0.22	≤0.24	≤0.25	≤0.28	≤0.38	≤0.50
4	最小拉断力	kN	≥26.0	≥28.0	≥30.0	≥40.0	≥52.0	≥75.0
5	(每芯) 导体直流电阻(20°C)	Ω/km	≤36.0					

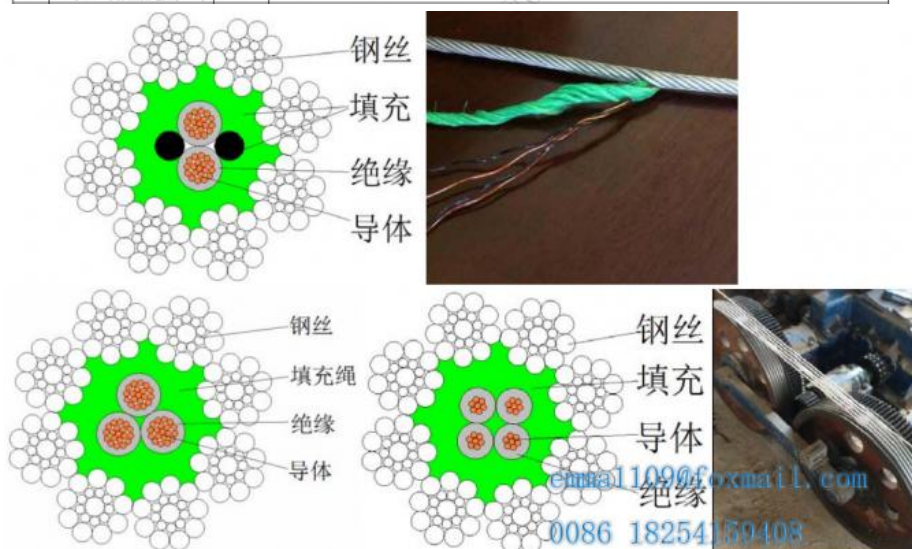

Service & After sales

1. Direct and Knowledgeable

Unlike larger organizations, we have the size and dynamics necessary to give you what you need in a timely and responsive manner. We have fast deliver and offer direct support from the moment you place the order, throughout the duration of the construction project and beyond.

2. Quality components

All components of our quality engineered cranes have clearly visible original manufacturer parts. Thus, if something needs replacing you can count on quick, reliable service.

More products available:

Tower Cranes

- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.
- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
- D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

SC Construction Man and Material Elevator

----- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

SS Building Material Lift / Hoist

----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.

ZLP Suspended Platform

---Most popular model ZLP630, ZLP800: 630KG AND 800KG



Building Hoist Spare Parts



Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1, Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China