

# SC100 Building Constructon Lifter with Two Motors Driving Unit Veichi Inverter

# **Basic Information**

• Place of Origin: China

• Brand Name: Avitt, XMR, HYCM or XINGDAO

Certification: CE, ISO

Model Number: SC100 Construction Elevator

• Minimum Order Quantity: 1 set

• Price: \$17800-22800 per set

• Packaging Details: Naked packing, 1\*40'Hc containers per set

SC100 Building Hoist

• Delivery Time: 15-25 days after receiving the deposit

Payment Terms: Western Union, L/C, T/TSupply Ability: 40 sets per month



# **Product Specification**

• Condition: 100% New

Application: Buildings And Projects

• Type: SINGLE CAGE

• Load: 1000kg

Speed: Normal Or Inverter Control

• Power supply: 380V/50Hz Or According To Client's

Requirements

Motor Power: 2\*11 Kw Or Others

Motor Brand: Shuangma, Taichang, Jinnuoi Or Other

• Mast Section Size: 650\*650\*1508mm



# More Images



# **Product Description**

#### SC100 Building Constructon Lifter with Two Motors Driving Unit Veichi Inverter

#### Simple parameter

Model: SC100 Single cage construction hoist

Rated load: 1000kg (1ton) Raged passengers: 10 Motor power: 2\*11kw

Rated lifting speed:33 or 0-34 m/min

Mast section size: 0.65\*0.65\*1.508m or 0.8\*0.8\*1.508m Cage size: 3.2\*1.5\*2.2m or according to clients needs Power supply: 380V/50Hz, 220V/60Hz or others

Max. Lifting height: 250m With all standard accessories

# Specification

-p	
SC100 single cage construction hoist	
Up to 1000 kg	
33 or 0-33 or others	
150-200 m (Increased lifting height on request.)	
1.3 m & 1.5 m	
3 m	
2.2 m	
Directly driven without inverter	
2x11 kw	
380V, 50Hz or 60 Hz, 3 phase	
650mm, Tubular steel with integrated rack	
1.508 m	
127 kg	

#### **Parts**

# 1. Driver Cabin

The driver cabin of our construction hoist is constructed from hot dip galvanized plates with surface powder spraying treatment which ensure superior corrosion resistance. It has fan that can improve driver's working environment.

#### 2. Gear Train

The new back gear is lengthened by one time at the stationary bearing end where it is equipped with locating taper pin to improve stress state and avoid loosening of back gear that will affect gear backlash.

The parts such as bear gear, idler wheel, etc. that have influence on running stability are improved to enhance machining and manufacturing precision. All of them will experience thermal refining treatment and galvanizing treatment after that, thus showing excellent durability. Case door pulley and cable pulley are made from nylon material which can prolong their life time and effectively reduce noise.

# **Accept OEM type**

#### **Picture**



#### More products available:


#### **Tower Cranes**

- ---- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.
- ---- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
- ---D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- ---QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

# SS Building Material Lift / Hoist

----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.

#### **ZLP Suspended Platform**

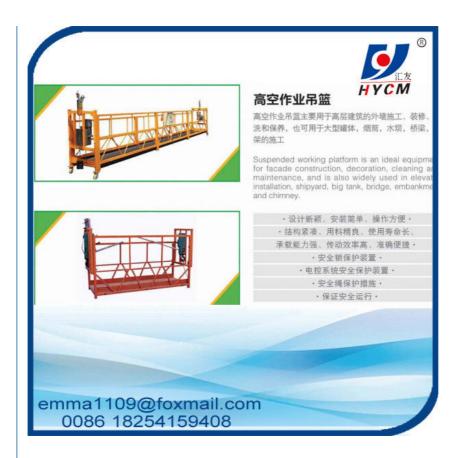

# **SJY Scissor Lift**





# Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com