

# QTZ40 4T Small Inner Climbing Tower Crane TC4708 1.5\*2.5M Block Mast Sections

## **Basic Information**

Place of Origin: China

Brand Name: Avitt or others

Certification: CE, ISO, GOST, CU-TR

Model Number: QTZ40(4708) Inner Climbing Tower Crane

• Minimum Order Quantity: 1 set

• Price: \$41900-49200 per set


Packaging Details: Naked packing, 4\*40'HQ containers.

• Delivery Time: 10 days after receiving the deposit or origin

LC

• Payment Terms: Western Union, L/C, T/T

Supply Ability: 40 sets per month



# **Product Specification**

• Condition: 100% New

Application: Buildings And ProjectsType: Fixed And Internal Climbing

Max. Load: 4tJib Length: 47mTip. Load: 0.8t

• Power supply: 380V/50Hz Or According To Client's

Requirements

• Mast section: 1.5\*1.5\*2.2m

• Highlight: qtz40 inner climbing tower crane,

4t inner climbing tower crane, qtz 40 self climbing tower crane



#### QTZ40 4T Small Inner Climbing Tower Crane TC4708 1.5\*2.5M Block Mast Sections

#### **Description of QTZ40 Internal Climbing Tower Crane**

Internal climbing tower crane adopts hydraulic climbing method, usually installed inside the building elevator. The working radius is fully utilized and so the working range is wide, valid hoisting capacity is strong compared to external climbing tower crane.

The crane climbs with the increase of the building height. The maximum hoisting height is 120m and standard mast height is only 26.4 m, which saves lots of purchasing cost, transportation fees and maintenance expenses.

#### Specification of QTZ40 Internal Climbing Tower Crane

opecinication of 41240 internal offinibility rower offine	
Model	QTZ40 (4708) Tower Crane
Туре	Internal climbing
Rated Lifting Moment(KN.M)	400
Rated Loading Capacity(T)	4
Max. Lifting Load(T)	4
Tip Load(T)	0.8
Mast section height(M)	26.4
Span(M)	47
Working range(M)	3 to 47
Slewing speed(r/min)	0.7/0.35
Trolley peed(m/min)	38.6/25.2
Jacking-up speed(m/min)	0.4
Power supply	380V/50Hz or according to client's requirements
Power Capacity(KW)	24.9
Electric switch box	Schneider
Hoisting speed(m/min)	(a=2) 65.14/32.57/7.0; (a=4) 32.14/15.6/3.5
Mast section(m)	1.5*1.5*2.2

#### **Advantages of QTZ40 Internal Climbing Tower Crane**

- 1. High Climbing Capacity
- 2. Best Economic Benefit
- 3. High Reliability
- 4. Multiple Usages
- 5. Convenient Installation and Dismantling

## New design Internal Climbing system which is center climbing



#### More products available: Construction Machinery Tower Cranes

- ---- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.
- ---- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
- ---D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- ---QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

#### SC Construction Man and Material Elevator

----- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

#### SS Building Material Lift / Hoist

----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.




**ZLP Suspended Platform and SJY Scissor Lift** 





**Gantry Crane** 

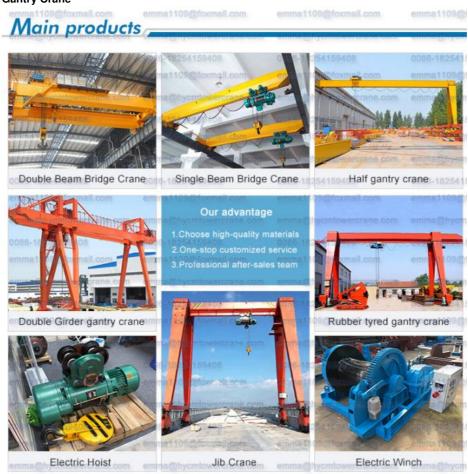

**Small Jib Crane** 





# Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane

0086-18254159408

emma1109@foxmail.com



hycmtowercrane.com

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China