

Small Mobile Spider 13m Concrete Placing Boom Radio Remote Control

Basic Information

- Place of Origin:
- Brand Name:
- Certification: CE, ISO
- Model Number:
- Minimum Order Quantity: 1 set
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

•	Highlight:	13m Mobile Spider Concrete Placing Boom, Small Mobile Spider Concrete Placing Boom, Remote Control Concrete Placing Boom
•	System Pressure:	20 MPa
•	Rotation Scope:	360
•	Power supply:	380V/50Hz Or According To Client's Requirements
•	Max. Horizontal Conveying Distance:	13m
•	Max. Vertical Conveying Distance:	13m
•	Power Type:	Electric
•	Туре:	Fixed And Mobile Type
•	Application:	Buildings And Projects

China

Avitt or others

origin LC

HGY13 Concrete placing boom

Naked packing, 40'HC containers.

10-15 days after receiving the deposit or

TT, LC, Western Union, MoneyGram

\$15500-28800 per set

100 sets per month



Our Product Introduction

Small Mobile Spider 13m Concrete Placing Boom Radio Remote Control

Performance parameters

Max. boom length - 13 m;

Concrete pipe line (steel, DN125 mm), outer diameter of the and fitting on pipes - 148 mm,

The High pressure flexible concrete hose with two and fitting (3000 mm) must be included in the delivery; Support - outrigger (4 legs);

Remote control - wired remote control.

Specification

Specification							
Mobile Hydraulic Conc	rete Placing I	Boom					
Project name	HGY13	HGY15	HGY17	HGY19	HGY21	HGY23	
Max. working radius	13m	15m	17m	19m	21m	23m	
Tilt working range	0°~84°	0°~89°	0°~84°	0°~84°	0°~84°	-4°~90°	
Slewing working range	Full Rotary						
Motor power of hydraulic washing system	4kw	4kw	5.5kw	7.5kw	22kw	22kw	
Working pressure of hydraulic system	20mpa	20mpa	20mpa	20mpa	32mpa	32mpa	
Slewing speed	0.46r/min	0.2- 0.3/min	0.2-0.3/min	0.2-0.3/min	0.2- 0.3/min	0.2- 0.3/min	
Concrete pipe Ø125*4							
Length of hose at arm end	3m						
Dutrigger span 4000*4000mm		4231*4231mm		5167*5167mm			
Overall size of the machine	8900*4000* 2585	6000*500 0*4000	6670*5730* 4510	6500*4800* 2	500*4800*4600*531		
Slewing angle	360°	360°	360°	360°	360°	360°	
Weight (self- weight/counterweight T)	2.7/4.3	3.23/5.43	5/7.2	5.3/7.5	7.7/9.9	8/10.2	

Our Skilled Team

Our R&D team is made up of the most prestigious, experienced engineers and experts in this field. Our technicians team are all experienced senior mechanicians.

We provide satisfactory service (pre-sale, while-sale, after-sale).

Our professional advice and instruction are always available and acceptable.

FEATURES

1. One button stabilization technology

The press of a button brings the boom to a smooth and immediate stop.

2. Smart boom system

Advanced technology to increase overall efficiency and reduce operator fatigue.

3. Boom anti-vibration technology

Minimizes chatter during pumping, to allow steady delivery.

4. Swing control technology

Rotary braking delivers precise swing operations.

5. Highly wear-resistant parts

Improved service life and reduced operating costs.

6. Protection technology

Features such as boom overload protection and hydraulic oil level monitoring are used to prevent damage.

7. Energy-saving technology

Increased pumping efficiency equals reduced fuel consumption.

A. Pre-sales service:

- 1. Selecting the most suitable equipment,
- 2. Designing your personal machinery according to special construction demands,
- 3. Training your technicians to operate our equipment,
- 4. Providing advice to ensure equipment running well in various construction. environments,
- 5. Making new construction scheme if necessary.


B. Sales service:

- 1. Equipment delivery transport agent,
- 2. Equipment quality control before delivery,
- 3. Introduce our service system to customers.

C. After-sales service:

- 1. Making the first construction scheme,
- 2. Installing and debugging your equipment,
- 3. Troubleshooting on site, prompt and initiative,
- 4. door to door accessories and parts,
- 5. Opportunities to get technical communications with our engineers.

- D. Value-added service:
- 1. Overall process and zero distance technology tracking service for key projects,
- 2. Carry out large maintenance business,
- 3. Regular equipment checking service,
- Technology update,
 Provide professional periodic maintenance standards for customers.

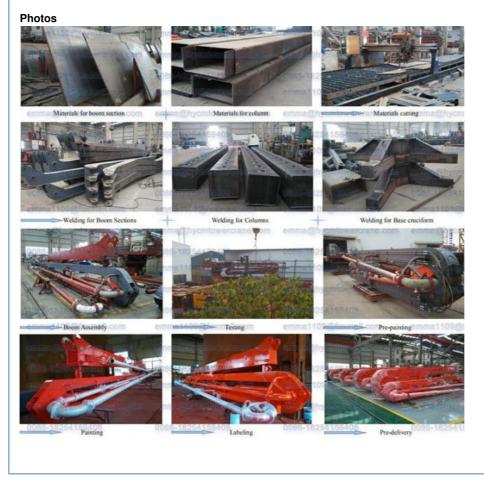

Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane 0086-18254159408 emma1109@foxmail.com *by* hycmtowercrane.com No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China