

13.5m Boom Placer Concrete Distributing Machine HGY Boom Placer For Concrete Building

Basic Information

Place of Origin: China

Brand Name: Avitt ZHONGFAN or others

Certification: CE, ISO

Model Number: HGY14 Concrete placing boom

• Minimum Order Quantity: 1 set

• Price: \$15500-28800 per set

• Packaging Details: Naked packing, 20'GP containers per set

HGY14 Placing boom

• Delivery Time: 10-15 days after receiving the deposit or

origin LC

• Payment Terms: TT, LC, Western Union, MoneyGram

Supply Ability: 100 sets per month



Product Specification

Application: Buildings And ProjectsType: Fixed And Mobile Type

Power Type: ElectricMax. Vertical Conveying 13.5m

Max. Horizontal Conveying 13.5m

Distance:

Distance:

• Power supply: 380V/50Hz Or According To Client's

Requirements

Rotation Scope: 360System Pressure: 20 MPa

Highlight: Concrete Building Distributing Machine,

13m Boom Concrete Distributing Machine, HGY Boom Concrete Distributing Machine



Product Description

13.5m Boom Placer Concrete Distributing Machine HGY Boom Placer For Concrete Building

Performance parameters

Max. boom length - 13 m;

Concrete pipe line (steel, DN125 mm), outer diameter of the and fitting on pipes - 148 mm,

The High pressure flexible concrete hose with two and fitting (3000 mm) must be included in the delivery;

Support - outrigger (4 legs);

Remote control - wired remote control.

Specification

	opeometrion						
Mobile Hydraulic Concrete Placing Boom							
Project name	HGY13	HGY15	HGY17	HGY19	HGY21	HGY23	
Max. working radius	13m	15m	17m	19m	21m	23m	
Tilt working range	0°~84°	0°~89°	0°~84°	0°~84°	0°~84°	-4°~90°	
Slewing working range	Full Rotary						
Motor power of hydraulic washing system	4kw	4kw	5.5kw	7.5kw	22kw	22kw	
Working pressure of hydraulic system	20mpa	20mpa	20mpa	20mpa	32mpa	32mpa	
Slewing speed	0.46r/min	0.2- 0.3/min	0.2-0.3/min	0.2-0.3/min	0.2- 0.3/min	0.2- 0.3/min	
Concrete pipe specification	Ø125*4						
Length of hose at arm end	3m						
Outrigger span	4000*4000mm		4231*4231mm		5167*5167mm		
Overall size of the machine	8900*4000* 2585	6000*500 0*4000	6670*5730* 4510	6500*4800*4600*531 2		6839*50 89 *5060*58 00	
Slewing angle	360°	360°	360°	360°	360°	360°	
Weight (self- weight/counterweight T)	2.7/4.3	3.23/5.43	5/7.2	5.3/7.5	7.7/9.9	8/10.2	

Our Skilled Team

Our R&D team is made up of the most prestigious, experienced engineers and experts in this field. Our technicians team are all experienced senior mechanicians.

We provide satisfactory service (pre-sale, while-sale, after-sale).

Our professional advice and instruction are always available and acceptable.

FEATURES

1. One button stabilization technology

The press of a button brings the boom to a smooth and immediate stop.

2. Smart boom system

Advanced technology to increase overall efficiency and reduce operator fatigue.

3. Boom anti-vibration technology

Minimizes chatter during pumping, to allow steady delivery.

4. Swing control technology

Rotary braking delivers precise swing operations.

5. Highly wear-resistant parts

Improved service life and reduced operating costs.

6. Protection technology

Features such as boom overload protection and hydraulic oil level monitoring are used to prevent damage.

7. Energy-saving technology

Increased pumping efficiency equals reduced fuel consumption.

A. Pre-sales service:

- 1. Selecting the most suitable equipment,
- 2. Designing your personal machinery according to special construction demands,
- 3. Training your technicians to operate our equipment,
- 4. Providing advice to ensure equipment running well in various construction. environments,
- 5. Making new construction scheme if necessary.

B. Sales service:

- 1. Equipment delivery transport agent,
- 2. Equipment quality control before delivery,
- 3. Introduce our service system to customers.


C. After-sales service:

- 1. Making the first construction scheme,
- 2. Installing and debugging your equipment,
- 3. Troubleshooting on site, prompt and initiative,
- 4. door to door accessories and parts,
- Opportunities to get technical communications with our engineers.

D. Value-added service:

- 1. Overall process and zero distance technology tracking service for key projects,
- 2. Carry out large maintenance business,
- 3. Regular equipment checking service,
- 4. Technology update,4. Provide professional periodic maintenance standards for customers.

Photos

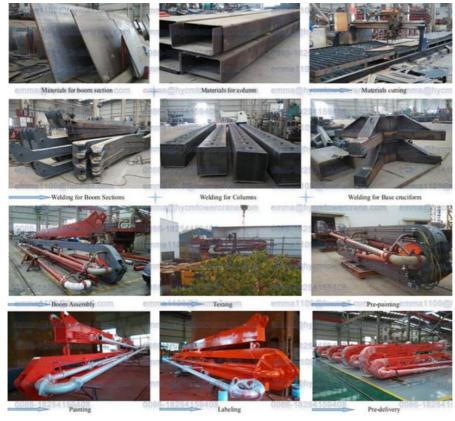



Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China