

# 7mm Wire Ropes Electrical Conductor For Building Maintenance Units Or Gondola

# **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 200meters
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



# **Product Specification**

• Condition: 100% New Application: For BMU Systerm Or Other Equipment Galvanized, Wire Rope Sling Type: Color: Standard Or According To Clients Need 7mm Diameter: • Tensile Strengt: 1570mpa ~ 1960mpa • Surface Treatment: Galvanized Or Ungalvanized • Material: Q235 Steel Building Maintenance Units Wire Ropes,

China

ISO

rope

Avit or others

DG-7.0/26 8\*19

\$3-50 per meter

Reel, Drum, Carton, Pallet, LCL or FCL 20'GP and 40'HC containers for special wire

7-15 days after receiving the deposit

Gondola Wire Ropes, 7mm Wire Ropes

Western Union, T/T, MoneyGram

30000 meters per month

Highlight:

008618254159408

Our Product Introduction

#### 7mm Wire Ropes with Electrical Conductor for Building Maintenance Units or Gondola

## Description

It is mainly used in window cleaner equipment / BMU system or oil field detection equipment can also be used in marine engineering, and can also be used for vehicle signal transmission, anti-rat bites, etc. Special function, characterized by good softness.

### Feature

### Features

Operating temperature:  $-50^{\circ}$ C ~  $+80^{\circ}$ C (design according to requirements); nominal cross-sectional area of conductor: 0.6mm 2 ~ 1.5mm 2; Cable breaking force: 0kN 50kN, can also be designed according to user needs cable outer diameter: 5mm 16mm.

序号	項目	单位	DG-7.0/26.0 (2)	DG-7.5/28.0 (2/3)	DG-8.0/30.0 (3)	DG-9.0/40.0 (3)	DG-10.0/52.0 (3)	DG-12.0/75.0 (3)
1	钢丝绳标称直径	mm	7.0±0.2	7.5±0.2	8.0±0.2	9.0±0.2	10.0±0.2	12.0±0.2
2	芯敷	芯	2	2 成 3	3 (	3	3	3
3	单位重量	kg/m	≤0.22	≤0.24	≤0.25	≤0.28	≤0.38	≤0.50
4	最小拉断力	kN	≥26.0	≥28.0	≥30.0	≥40.0	≥52.0	≥75.0
5	(毎芯)导体直流电阻(20°C)	Q/km	≤36.0					

#### Service & After sales

1. Direct and Knowledgeable

Unlike larger organizations, we have the size and dynamics necessary to give you what you need in a timely and responsive manner. We have fast deliver and offer direct support from the moment you place the order, throughout the duration of the construction project and beyond.

### 2. Quality components

All components of our quality engineered cranes have clearly visible original manufacturer parts. Thus, if something needs replacing you can count on quick, reliable service.



More products available: Tower Cranes

---- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.

- ---- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
- ---D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- ---QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.


#### SC Construction Man and Material Elevator

----- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

SS Building Material Lift / Hoist

----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.

ZLP Suspended Platform ----Most popular model ZLP630, ZLP800: 630KG AND 800KG

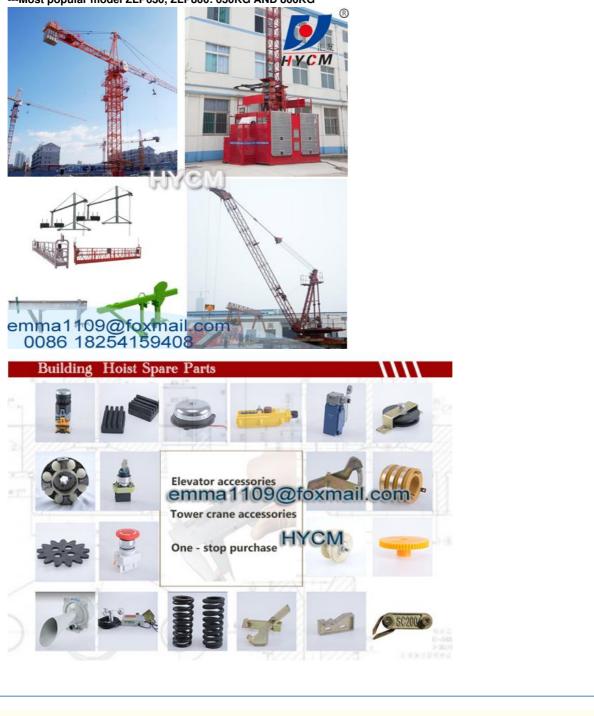

Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane

0086-18254159408

emma1109@foxmail.com

*by* hycmtowercrane.com

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China