



New Update HGY14 Concrete Placing Boom Reach 13.5m Straight Legs Base

Our Product Introduction

Basic Information

- Place of Origin: China
- Brand Name: Avitt or others
- Certification: CE, ISO
- Model Number: HGY14 Concrete placing boom
- Minimum Order Quantity: 1 set
- Price: \$15500-28800 per set
- Packaging Details: Naked packing, 20'GP containers for 2sets HGY14 Concrete placing boom
- Delivery Time: 10-15 days after receiving the deposit or origin LC
- Payment Terms: TT, LC, Western Union, MoneyGram
- Supply Ability: 100 sets per month



Product Specification

- Application: Buildings And Projects
- Type: Fixed And Mobile Type
- Power Type: Electric
- Max. Vertical Conveying Distance: 13.5m
- Max. Horizontal Conveying Distance: 13.5m
- Power supply: 380V/50Hz Or According To Client's Requirements
- Rotation Scope: 360
- System Pressure: 20 MPa
- Highlight: 13.5m Concrete Placing Boom, Concrete Placing Boom, Straight Legs Base Concrete Placing Boom



for more products please visit us on hycmtowercrane.com

Product Description

New Update HGY14 Concrete Placing Boom Reach 13.5m Straight Legs Base

Performance parameters

Max. boom length - 13.5 m;

Concrete pipe line (steel, DN125 mm), outer diameter of the and fitting on pipes - 148 mm

The High pressure flexible concrete hose with two and fitting (3000 mm) must be included in the delivery;

Support - outrigger (4 legs);

Remote control - wired remote control.

Specification

Mobile Hydraulic Concrete Placing Boom						
Project name	HGY14	HGY15	HGY17	HGY19	HGY21	HGY23
Max. working radius	13.5m	15m	17m	19m	21m	23m
Tilt working range	0°~84°	0°~89°	0°~84°	0°~84°	0°~84°	-4°~90°
Slewing working range	Full Rotary					
Motor power of hydraulic washing system	4kw	4kw	5.5kw	7.5kw	22kw	22kw
Working pressure of hydraulic system	20mpa	20mpa	20mpa	20mpa	32mpa	32mpa
Slewing speed	0.46r/min	0.2-0.3/min	0.2-0.3/min	0.2-0.3/min	0.2-0.3/min	0.2-0.3/min
Concrete pipe specification	Ø125*4					
Length of hose at arm end	3m					
Outrigger span	4000*4000mm		4231*4231mm		5167*5167mm	
Overall size of the machine	8900*4000*2585	6000*5000*4000	6670*5730*4510	6500*4800*4600*5312		6839*5089*5060*5800
Slewing angle	360°	360°	360°	360°	360°	360°
Weight (self-weight/counterweight T)	2.7/4.3	3.23/5.43	5/7.2	5.3/7.5	7.7/9.9	8/10.2

Our Skilled Team

Our R&D team is made up of the most prestigious, experienced engineers and experts in this field. Our technicians team are all experienced senior mechanics.

We provide satisfactory service (pre-sale, while-sale, after-sale).

Our professional advice and instruction are always available and acceptable.

FEATURES

1. One button stabilization technology

The press of a button brings the boom to a smooth and immediate stop.

2. Smart boom system

Advanced technology to increase overall efficiency and reduce operator fatigue.

3. Boom anti-vibration technology

Minimizes chatter during pumping, to allow steady delivery.

4. Swing control technology

Rotary braking delivers precise swing operations.

5. Highly wear-resistant parts

Improved service life and reduced operating costs.

6. Protection technology

Features such as boom overload protection and hydraulic oil level monitoring are used to prevent damage.

7. Energy-saving technology

Increased pumping efficiency equals reduced fuel consumption.

A. Pre-sales service:

1. Selecting the most suitable equipment,
2. Designing your personal machinery according to special construction demands,
3. Training your technicians to operate our equipment,
4. Providing advice to ensure equipment running well in various construction environments,
5. Making new construction scheme if necessary.

B. Sales service:

1. Equipment delivery transport agent,
2. Equipment quality control before delivery,
3. Introduce our service system to customers.


C. After-sales service:

1. Making the first construction scheme,
2. Installing and debugging your equipment,
3. Troubleshooting on site, prompt and initiative,
4. door to door accessories and parts,
5. Opportunities to get technical communications with our engineers.

D. Value-added service:

1. Overall process and zero distance technology tracking service for key projects,
2. Carry out large maintenance business,
3. Regular equipment checking service,
4. Technology update,
4. Provide professional periodic maintenance standards for customers.

Photos

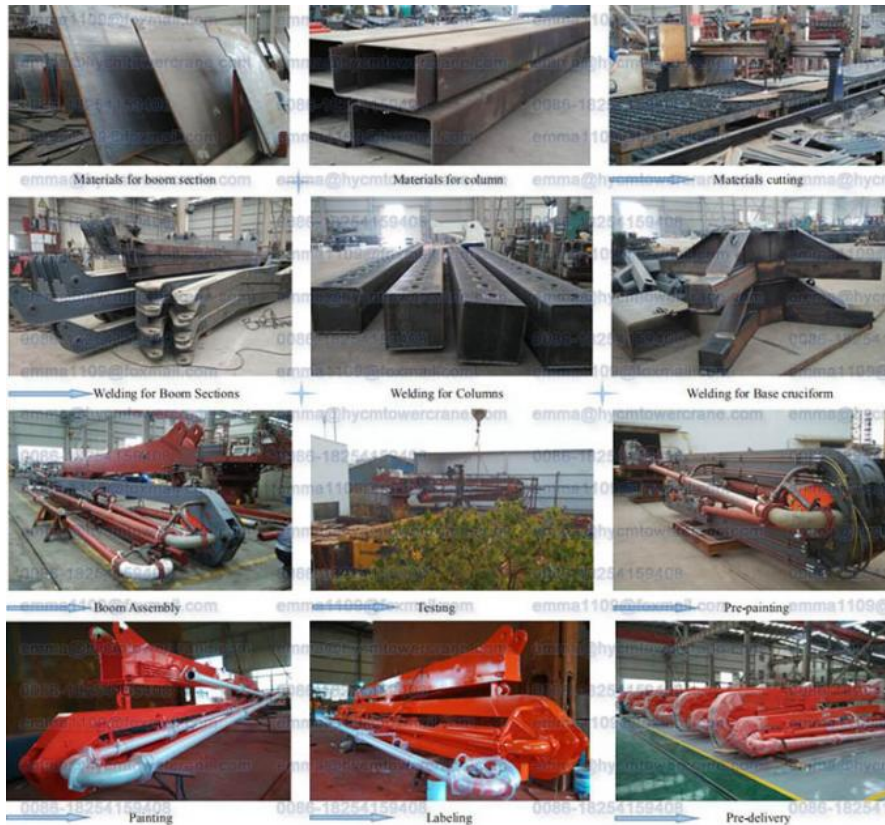

Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1, Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China