




HGY14-3 Concrete Place Boom with High Strenth Steel Load into 20'GP Containers

Our Product Introduction

for more products please visit us on hycmtowercrane.com

Basic Information

- Place of Origin: China
- Brand Name: AVITT ZHONGFAN or others
- Certification: CE, ISO, GOST, CU-TR
- Model Number: HGY14-3 Concrete Place Boom
- Minimum Order Quantity: 1 set
- Price: \$15600-22900 per set
- Packaging Details: Naked packing, 1*20'GP containers per set HGY14-3 Concrete Place Boom
- Delivery Time: 10 days after receiving the deposit or origin LC
- Payment Terms: Western Union, L/C, T/T
- Supply Ability: 40 sets per month

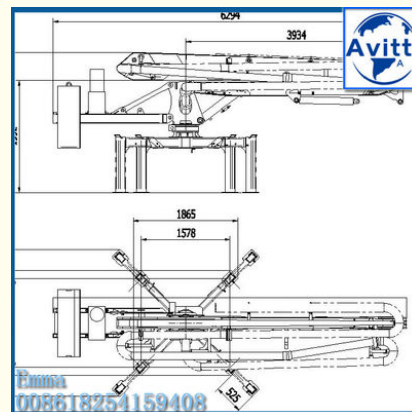

Product Specification

- Product Name: HGY14-3 Concrete Place Boom With High Strenth Steel Load Into 20'GP Containers
- Support: Outrigger (4 Legs)
- Slewing Speed: 0.2-0.3/min
- Motor Power Of Hydraulic Washing System: 4kw
- Rotation Scope: 360
- High Pressure Flexible Concrete Hose Length: 3000 Mm
- Max. Boom Length: 13.5 M
- Product Category: Placing Boom
- Highlight: **13.5m Concrete Placing Boom, Concrete Placing Boom,**



Product Description

HGY14-3 Concrete Place Boom with High Strenth Steel Load into 20'GP Containers

Performance parameters

Max. boom length - 13.5 m;

Concrete pipe line (steel, DN125 mm), outer diameter of the and fitting on pipes - 148 mm

The High pressure flexible concrete hose with two and fitting (3000 mm) must be included in the delivery;



Support - outrigger (4 legs);

Remote control - wired remote control.

Specification:

Model			HGY14
Performance	Horizontal reach(m)		13.5
	Rotation(°)		360°
	Elevation angle(°)		0 80°
	Slewing brake		Normally closed
	Working environment temperature		-20 40
	Weight(T)	Without counterweight	2.1
		With Counterweight	3.5
Outrigger Span		2321×2321	
Control System	Power Supply		380V/50HZ, 3Phase
	Power(kW)		4
	Protection grade		IP54
	Insulation class		F
	System Pressure(MPa)		20
	Control mode		Cable/Radio remote
Boom	Duct cleaning method		Wash/Dry cleaning
	Boom open way		Three R
	Inner diameter of delivery pipe(mm)		Φ125
	End rubber hose(m)		3
	Length(mm)		3700/4850/4950
	Corner(°)		80/180/195

The HGY concrete placing boom is a spreading equipment used in conjunction with concrete pumps for pouring concrete during construction, suitable for any concrete building such as buildings, bridges, roads, foundations, etc. The use of concrete placing boom can fully utilize the working efficiency of concrete pumps, improve pouring quality, and reduce labor intensity.

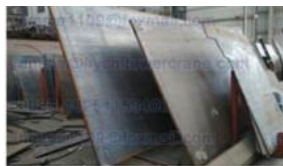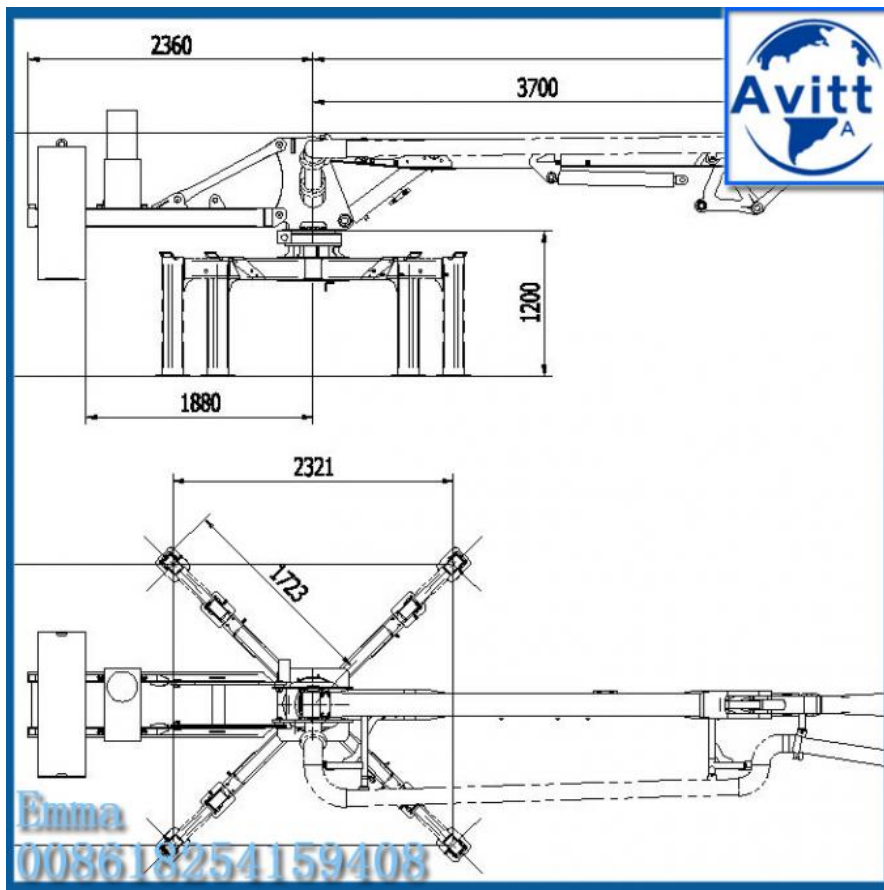

emma1109@foxmail.com Materials for boom section



emma@hycm1 Materials for column



emma@hycm1 Materials cutting



Welding for Boom Sections



Welding for Columns



Welding for Base cruciform



Boom Assembly



Testing



Pre-painting



Painting



Labeling



Pre-delivery



Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1, Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China

