

# Power Cable Jib Tower Crane QTZ160 With Remote Control And Block Box

## **Basic Information**

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time: 20 days after receiving the deposit or origin

China HYCM

1

LC

TT, LC

10 sets per month

According To Clients Need

CE, ISO, GOST, CU-TR

\$120200-129500 per set

QTZ160(6024) Tower Crane

Naked packing, 6\*40'HQ or 7\*40;HQ

- . -
- Payment Terms:
- Supply Ability:



## **Product Specification**

• Condition: 100% New • Application: **Buildings And Projects** Fixed With Tower Head • Type: • Max. Load: 10t • Jib Length: 60m • Tip. Load: 2.4t • Power supply: 380V/50Hz Or According To Client's Requirements 1.835\*1.835\*2.5m Or 2\*2\*3m Mast section: Schneider Electric Box: • Power Supply: 380V/50Hz, 415V/50Hz, 220V/50Hz Or



## More Images



## **Product Description**

#### Power Cable Jib Tower Crane QTZ160 With Remote Control And Block Box

#### **Capacity Introduction**

1. The main stressed steel parts of QTZ160 tower crane use Q345B steel, the tower body mast section 1.835m\*1.835m\*2.5m, using on-chip-type or standard mast section of two forms of production.

2. Light weight, air resistance is small, convenient transportation. Rotation adopts double rotary organization. Lifting mechanism is driven by frequency converted motor, running steady.

### Specification

| 1600                                            |
|-------------------------------------------------|
| 10                                              |
| 10                                              |
| 2.4                                             |
| 200                                             |
| 50                                              |
| 500                                             |
| 60                                              |
| 3 to 60                                         |
| 0-0.6                                           |
| 0-60                                            |
| 0.4                                             |
| 14.6                                            |
| 380V/50Hz or according to client's requirements |
| 61.5                                            |
| Schneider                                       |
| 125*14 /two angle steel with rib                |
| 1.835*1.835*2.5                                 |
|                                                 |

#### **Outstanding Features**


1. The tower crane is a combination of advanced technologies of the present day.

2. It is equipped with a hydraulic self-raising mechanismand afrequency-converting slewing mechanism.

3. The electric control system of the tower crane adopts the advanced "PLC + frequency converter" control mode of the present day, which has realized the stepless speed regulation and greatly improves the reliability, maneuverability and stability of the control system and the work efficiency of the tower crane.

4. The tower crane is equipped with all kinds of reliable safety devices, such as hoisting height limiter, slewing range limiter and multifunctional limiter to control the load moment, hoisting capacity and trolley traveling range.

#### Pictures

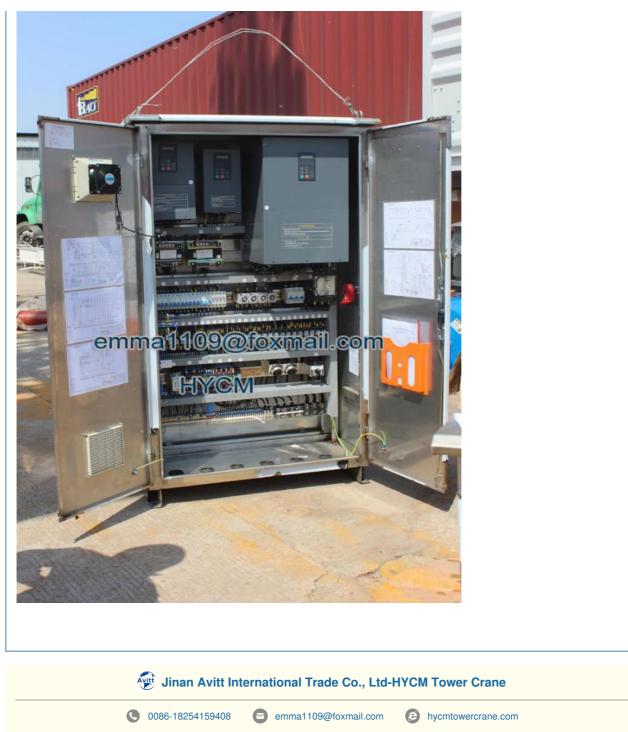

No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China