

QTZ50 High-Rise Tower Crane For Construction Building 5 Tons Hydraulic Types

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:



Product Specification

| Condition: | 100% New | |
|-----------------------------------|--|--|
| Application: | Buildings And Projects | |
| • Type: | Fixed With Tower Head | |
| Max. Load: | 5 T | |
| Jib Length: | 50 M | |
| • Tip. Load: | 1.0 T | |
| • Power supply: | 380V/50Hz Or According To Client's Requirements | |
| Mast section: | 1.5*1.5*2.5 M | |
| Color: | Yellow Or According To Clients Needs | |
| Control System: | Normal One | |

China HYCM

1

LC TT, LC

CE, ISO, GOST, CU-TR

\$34000-36300 per set

40 sets per month

containers.

QTZ50(5010) Tower Crane

Naked packing, 3*40'HQ+1*20'GP

10 days after receiving the deposit or origin



More Images



QTZ50 High-Rise Tower Crane For Construction Building 5 Tons Hydraulic Types

Service

a. Rapid response to any inquiry(within 3 hours) and 24 hours on-line service. b. Competitive price which directly work with facotry. Welcome to visit us.

c. Professional inspection department to guarantee quality.

d. Engineers will go to construction site for guiding the installation and test-running for first time.

e. Easy-worn Spare parts is free supplied along with the tower crane. f. 12 months super long time guarantee period.

Specification

| | | Specification |
|--------------------------------|------------------|--|
| Model | | QTZ50 (TC5010) Tower Crane |
| Туре | | Fixed and external climbing type |
| Working Radius (m) | | 50 |
| Max. Load Capacity (T) | | 5 |
| Tip Load (T) | | 1.0 |
| Freestanding height (m) | | 30 |
| Max. Height with anchorage (m) | | 120 |
| Mast Section dimension (m) | | 1.6×1.6×2.5, Square 135×10mm |
| Hoisting Mechanism | Speed (m/min) | (a=2) 64.15/32.57/7.0 (a=4) 32.14/15.60/3.5 |
| | Motor power (kw) | 15/15/4 |
| Slewing Mechanism | Speed (r/min) | 0.70/0.35 |
| | Motor power (kw) | 3.7*2 |
| Trolleying Mechanism | Speed (m/min) | 38.6/25.2 |
| | Motor power (kw) | 2.2/1.5 |
| Jacking-up System | Speed (m/min) | 0.4 |
| | Motor power (kw) | 4 |
| Total Power (kw) | | 24.9 |
| Power Supply | | 380V/50Hz or according to clients needs |

Safety Features

1. Overload protection: If the material is over the capacity, the crane will give a sharp warning for protection itself 2. Emergency brake: If the operation staff encounter some emergency situation, we could start the emergency brake system to protection the related treasure.

3. Control Method: Room control or remote control to avoid any injure to the operation staff

4. Main lifting motor: with thermal protection and currency protection

Main markets for tower crane:

1. Middle East

2. Asia


3. Russia

4. South America

5. Oceania

6. North America

Loading Containers

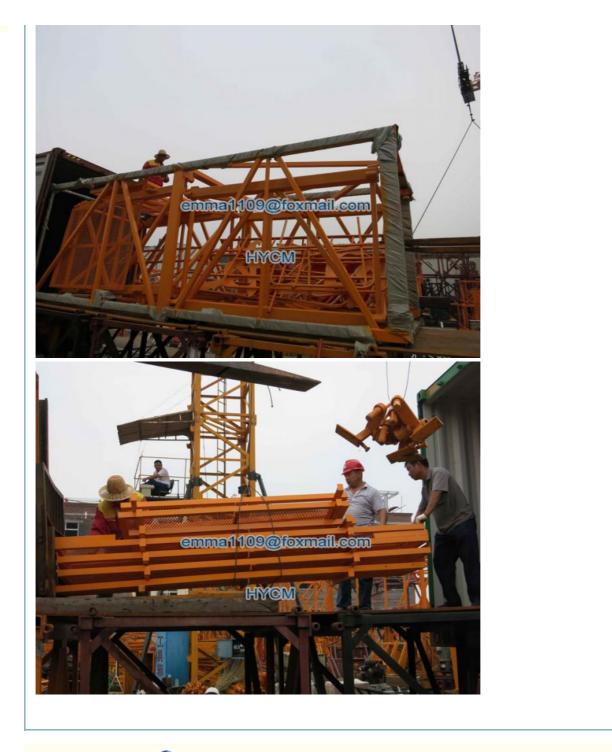



0086-18254159408

emma1109@foxmail.com

e hycmtowercrane.com

No.218-1, Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China