




## QTZ6520 Cranes Tower Top Climbing 65m Working Jib Length With Head

Our Product Introduction

for more products please visit us on hycmtowercrane.com

### Basic Information

- Place of Origin: China
- Brand Name: HYCM
- Certification: CE, ISO, GOST, CU-TR
- Model Number: QTZ230(6520) Tower Crane
- Minimum Order Quantity: 1
- Price: \$130900-145500 per set
- Packaging Details: Naked packing, 7\*40;HQ containers.
- Delivery Time: 30 days after receiving the deposit or origin LC
- Payment Terms: TT, LC
- Supply Ability: 10 sets per month

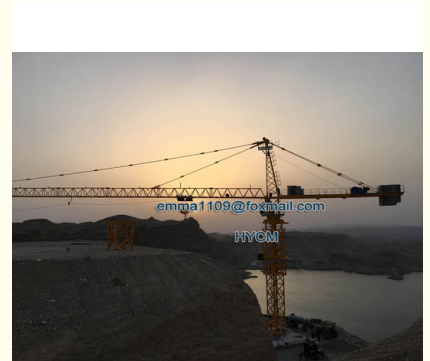


### Product Specification

- Condition: 100% New
- Application: Buildings And Projects
- Type: Fixed With Tower Head
- Max. Load: 10 T
- Jib Length: 65 M
- Tip. Load: 2.0 T
- Power supply: 380V/50Hz Or According To Client's Requirements
- Mast section: 2\*2\*3 M
- Electric Box: Schneider
- Power Supply: 380V/50Hz, 415V/50Hz, 220V/50Hz Or According To Clients Need



### More Images



## Product Description

### QTZ6520 Cranes Tower Top Climbing 65m Working Jib Length With Head

#### Description

TC6520 fixed Tower Crane is our new design model which composes metal structure, mechanism deriving, hydraulic-hoisting mechanism and a series of superior limiters: hoisting moment limiter, hoisting load limiter, slewing limiter, radius- variation limiter, height limiter, the rope-break and shaft-break protection device of the jib trolley, wire cable twisting protection device and brakes of the slewing, radius-variation All the reliable devices make the dreary work simple and smooth.

#### Specification

Rated Lifting Moment (KN.M)	2300
Rated Loading Capacity (t)	10
Max. Lifting Load (t)	10
Span (m)	65
Working range (m)	3 to 65
Tip Load (t)	2.0
Max. Lifting Height (m)	180
Free standing height (m)	60
Rope length (m)	500
Slewing speed (r/min)	0-0.6
Trolley peed (m/min)	0-60
Jacking-up speed (m/min)	0.4
Power supply	380V/50Hz or according to client's requirements
Power Capacity (kw)	61.5
Electric switch box	Schneider
Main Material (mm)	200*20 / angle steel
Mast section (m)	2*2*3 (split type)

#### Characteristics

- 1) Lifting multiplying factor switch-over which could achieve high speed for light load and low speed for heavy load.
  - 2) Our tower sections are exchangeable, which provide our customers more conveniences.
  - 3) We adopt to use Dual drawbars structure on lifting boom, which enables the lifting boom to be under no stress at lifting surface other than uniaxial stress, and moreover, it gets rid of the stress peak. It greatly improves the fatigue safety performance of lifting boom.
  - 4) Adopts VVVF stepless speed variation device for lifting, radius changing and slewing mechanisms, to make sure it works steadily and effectively, it also lowers the maintenance cost.
- It's lifting height is obviously increased thanks to its self-erecting and wall attached function.

It is applicable for construction of different industrial, commercial, office, and civil building lower than 120m, and becomes an ideal service-building machine at home.

#### Advantage

1. Export to more than 20 countries with CE/ ISO/ GOST Certifications by skilled sales team.
2. Mobile and internal climbing type tower cranes are also offering as new designed mast sections.
3. High Quality control: blasting and rust protection painting with advanced painting process. Strict and experience welding line.
4. Well known Mechanisms system and Schneider Electronic control system.
5. Engineers are available to service machinery overseas within 12 months warranty from the B/L date.
6. One set free easy-worn spare parts are provided with per set tower cranes.

#### Pictures



**Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane**



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1, Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China