

10t Capacity QTD125 Luffing Tower Crane 4526 Models Factory Cost EXW

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity: 1 set
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms: TT, LC
- Supply Ability:



Product Specification

• Application: **Buildings And Projects** • Type: Fixed And External Climbing • Capacity: 10t • Working Boom: 45mts • Tip. Load: 2.6 T • Power supply: 380V/50Hz Or According To Client's Requirements Mast: 3mts • Main Chord: 200*20 Mm (angle Steel)

China HYCM

CE, ISO, GOST, CU-TR

\$136900-149000 per set

5 sets per month

QTD125 Luffing Tower Crane

Naked packing, 9*40'HQ containers.

30 days after receiving the deposit or origin



More Images



10t Capacity QTD125 Luffing Tower Crane 4526 Models Factory Cost EXW

Short Description

In tight urban work spaces there is often insufficient space for the jib to rotate without being blocked by existing buildings/structures or other cranes. For such sites, luffing jib cranes offers the ideal solution. Our luffing cranes range from 120 to 500tm.

All of our luffing cranes offer the standard features plus additional options such as level-luffing.

Specification

| Specification | |
|---------------------------------------|------------------------------------|
| Rated Lifting Moment | 1250KN.M |
| Rated Loading Capacity | 10t |
| Max. Lifting Load | 10t |
| Tip Load | 2.6t |
| Max. Lifting Height | 200m |
| Free standing height | 37.5m |
| Span | 45m |
| Working range | 5-45m |
| Slewing speed | 0-0.7 r/min |
| Trolley speed | 1min40s |
| Jacking-up speed | 0.4 m/min |
| Hoisting speed | (a=2) 0-80/40; (a=4) 0-40/20 |
| Counter jib length | 8.7m |
| Power supply | 380V/50Hz or according to client's |
| | requirements |
| Power Capacity | 89.5Kw |
| Electric switch box | Schneider |
| Main Material | 200*20/angle steel |
| Mast section | 2*2*3m, split structure |
| · · · · · · · · · · · · · · · · · · · | |

Competitive Advantage:

Light structure, good stability, convenient transportation; Mast sections are SAW welding, safe and reliable. Advanced mechanisms, equipped with various safety devices, mechanical or Mechatronics products work in wretched conditions to keep tower cranes work well.

Equipped with excellent safety devices produced by world-class technology, including weight limiter, moment limiter, height limiter, radius limiter, slewing limiter, slewing and trolleying brakes.

Anti-broken wire rope device and anti-broken shaft device

Advanced electronic appliances.

Commercial Terms

Price: Negotiable

Delivery time: 20-40 days after receiving 30% advanced payment

Trade terms: FOB (qingdao)


Terms of Payment: T/T or L/C (30% advanced payment, 70% before shipment)

Packing: Standard Exporting Packing

Warranty: At least 12 months

Photos



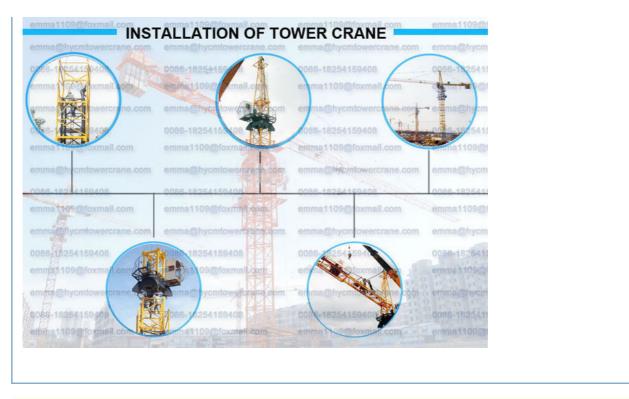

Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane
0086-18254159408 emma1109@foxmail.com
hycmtowercrane.com
No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China