

2000kg Moving Self Erect Crane Tower 20meter Height For 2 Layer Building

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms:
- Supply Ability:





Product Specification

| Condition: | 100% New | |
|----------------------------------|---|--|
| Application: | Buildings And Projects | |
| • Type: | Self Erection Mobile | |
| • Max. Load: | 2t | |
| Jib Length: | 24m | |
| Max. Height: | 20m | |
| • Power supply: | 380V/50Hz, 415V/50Hz, 220V/60Hz Or According To Clients Need | |
| After Sale Service: | Engineers Available To Service Overseas | |
| Color: | Yellow Or According To Clients Need | |

40 sets per month



More Images



2000kg Moving Self Erect Crane Tower 20meter Height For 2 Layer Building

Short Parameters:

1. YT2024 Self Erecing Tower Crane

2. Type: mobile and self-erection

3. jib length: 24m

4. max.laod: 2t

5.height: 20m

Description

The self erecting tower crane as a whole transport, quickly set up the vertical, horizontal transport machinery. Mainly suitable for 1 to 5 layers civil construction buildings.

In addition, it can also be used all kinds of factories, garages, stations, terminals, etc. of cargo handling and stacking, and also serves as liquidity lifting transport machinery.

Specifications

| Specification | | Unit | YT2024-20 |
|----------------------|---------------------|-------|-----------|
| Max. height | | m | 20 |
| Max.load | | t | 2 |
| Working range | | m | 6-24 |
| Hoisting | Max.hoisting height | m | 20 |
| | Max.working radius | m | 24 |
| | Max.hoisting weight | Kg | 2000 |
| | Hoisting speed | m/min | 13/26 |
| | Trolleying speed | m/min | 20/40 |
| | Slewing speed | r/min | 0.25/0.8 |
| | Erecting time | min | 10 |
| | Outrigger span | m | 4.2x4.2 |
| | Dead weight | Kg | 26000 |
| Travel parameters | Max.towing speed | Km/h | 15 |
| Hydraulic system | Hydraulic system | Мра | 28 |
| Power supply | Rated Power | Kw | 23.1 |

Advantages of self erecting tower crane:

1. Without foundation, saving construction cost, low requirement for site conditions.

2. Erecting and starting rapidly.

3.None working on the high level during erecting and dismounting.

4. Mast locked automatically, jib sections connected automatically in the air.

5.No require professional operator, operating simply, mastering easily.


6. Wireless remote operating, reducing working labor strength, having wide operating view.


Transporting wholly.

Why choose us

1. A professional tower crane supplier in China with 15 years experience

- 2. Exported to more than 20 countries with ISO9001 & CE & GOST Certifications
- 3. Hydraulic self-climbing mechanism
- 4. Variable-frequency slewing mechanism
- 5. Varialbe-speed frequency PLC control System
- 6. Operation data display screen and Safety monitoring system
- 7. Various safety devices

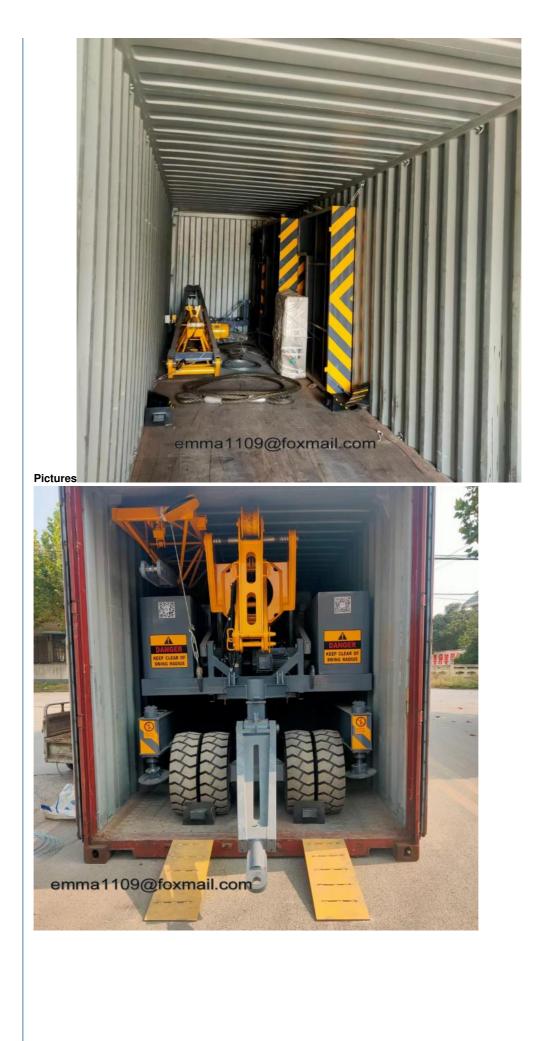

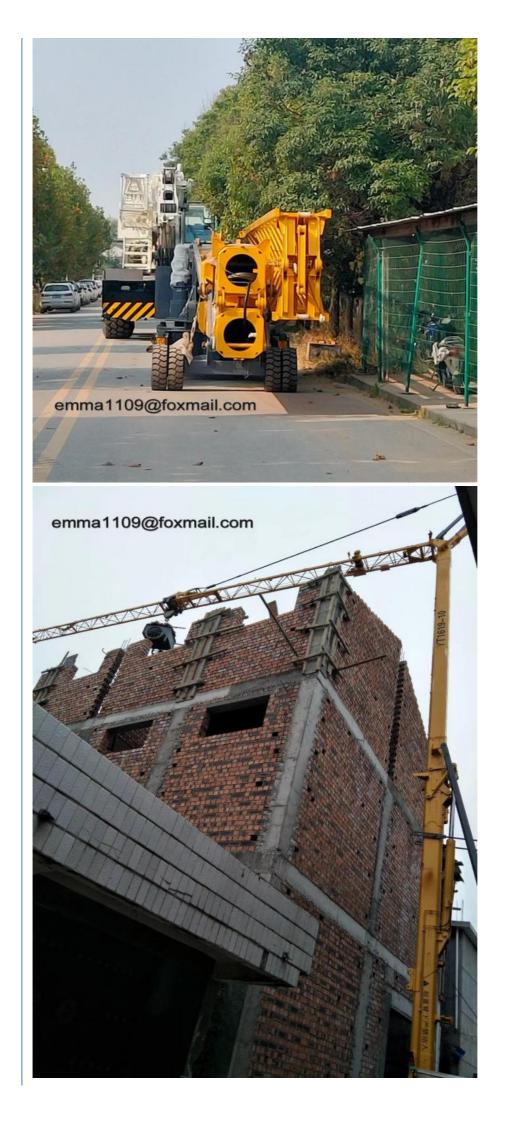

More products available: Construction Machinery Tower Cranes

---- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.

---- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.

---D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.

---QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

SC Construction Man and Material Elevator

----- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

SS Building Material Lift / Hoist

----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.









emma1109@foxmail.com

emma1109@foxmail.com

emma1109@

Main products



Small Jib Crane



No.218-1,Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China