

# QTZ125 Flat Top Tower Crane 10ton Load with Weight Moment Indicator 60m Jib

# **Basic Information**

• Place of Origin: China

Brand Name: Avitt, HYCM or others
Certification: CE, ISO, GOST, CU-TR
Model Number: PT6015 Tower Crane

Minimum Order Quantity:

• Price: \$72900-126900 per set

 Packaging Details: Naked packing, 6\*40'HC Containers for freestanding height PT6015 tower crane

• Delivery Time: 30 days after receiving the deposit

Payment Terms: TT, LC

• Supply Ability: 10 sets per month



# **Product Specification**

Application: Buildings And ProjectsType: Fixed Without Tower Head

Load: 10tTrolley Jib: 60mTip. Load: 1.5t

• Power supply: 380V/50Hz Or According To Client's

Requirements

Mast section: L46 1.6\*1.6\*3m
Main Chord: 180\*18mm
Control: VFD



# More Images



## **Product Description**

#### QTZ125 Flat Top Tower Crane 10ton Load with Weight Moment Indicator 60m Jib

#### **Short Parameter**

1.QTZ125(PT6015) Flat Top Tower Crane

2. Type: fixed and external climbing

3. jib length: 60m4. tip load: 1.5t5. max.laod: 10t

6.freestanding height: 45m

#### Characteristics

This Topless Tower Crane is one of the new catagory of HYCM company, which is designed and manufactured based on 21 years' experience on topkit tower crane

This kind of tower crane absorbs many advanced technologies from home and abroad;

The standard mast absorbs Potain technology, which can be transported easily and convenient;

The structure is designed reasonable and compact, with better mechnical performance and slinky outline.

The crane has complete set of safety devices, which can guarantee the safe and high efficient operation of the equipment. The machine is equipped with lifting height limiter, dolly range-change limiter, moment limiter, weight limiter and circumgyrating limiter, etc

#### Specification

Model		QTZ125(PT6015) Topless Tower Crane
Working Radius (m)		60
Max. Load Capacity (T)		10
Tip Load (T)		1.5
Free standing height (m)		45
Max. Height with anchorages (m)		160
Mast Section dimension (m)		1.6×1.6×3, angle steel 180×18mm L46
Hoisting Mechanism	Speed (m/min)	(a=2)0-100; (a=4)0-50
	Motor power (kw)	45
Slewing Mechanism	Speed (r/min)	0-0.6
	Motor power (kw)	2*5.5
Trolleying Mechanism	Speed (m/min)	0-60
	Motor power (kw)	5.5
Jacking-up System	Speed (m/min)	0.4
	Motor power (kw)	7.5
Total Power (kw)		61.5

#### **Advantages**

Three Mechanism: Hoisting mechanism, Slewing mechanism, Trolleying mechanism are fully controlled by VFD (various frequency device) which has realized the stepless speed regulation and greatly improves the reliability.

#### Control System

The PLC allows for automatic detection of electrical fault and issues corresponding sound and light alarm. Critical components are all procured from international famous enterprises.

#### Safety Protection Device

Our tower crane is equipped with many advanced or ingenious components apart from regular safety devices used in ordinary cranes for the purpose of enhancing its security and operating convenience.

#### Structure

Tanks to the advanced design tools, such as electro-mechanical design, CAD design, optimization design, and modular design, the tower crane proves to be a kind of optimum construction equipment that shows not only superb strength, stiffness and fatigue resistance but also outstanding comprehensive performance and reliability.

## **Safety Device**

- 1. 3 obstacle lights
- 2. Height limiter
- 3. Slewing limiter
- 4. Range/ trolley limiter
- 5. Weight limiter
- 6. Moment limiter
- 7. Anemometer and block box(optional)

#### **Photos**





# More products available: Construction Machinery Tower Cranes

- ---- QTZ Topkit/Hammer Head Tower Cranes: Working jib from 30-75m and max.load from 4-25t.
- ---- PT Topless/Flat Top Tower Cranes: Working jib from 30-80m and max.load from 4-32t.
- ---D Luffing Tower Crane: Working jib from 25-60m and max.load from 3-25t.
- ---QD Derrick Crane: load from 3t to 25t for disassemble inner climbing tower cranes.

# SC Construction Man and Material Elevator

----- Rack and pinion elevator, special for the lifting work of construction Man and Material, 1000kg to 4000kg capacity, Passenger and Material, up to 200m. .

#### SS Building Material Lift / Hoist


----- Wire rope lift, special material lifting work in construction site, 1000kg to 2000kg capacity, no passenger, up to 60m.



SJY Scissor Lift



**Gantry Crane** 

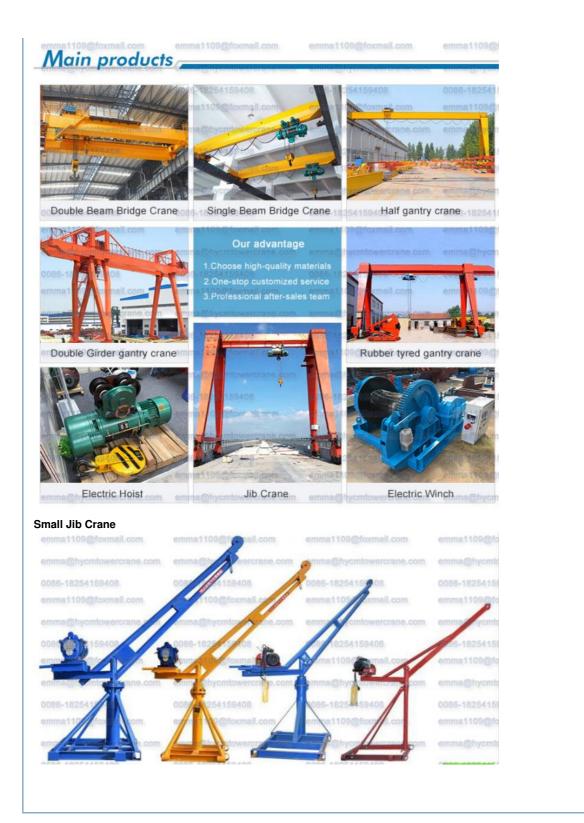



0086-18254159408

emma1109@foxmail.com

hycmtowercrane.com