


## PT4010 Inner Climbing Tower Crane With S24 Mast Setion In Brazil

### Our Product Introduction

#### Basic Information

- Place of Origin: China
- Brand Name: Avitt, Kangtai or others
- Certification: CE, ISO, GOST, CU-TR
- Model Number: QTZ40(4010) Inner Climbing Tower Crane
- Minimum Order Quantity: 1 set
- Price: \$40000-49900 per set
- Packaging Details: Naked packing, 3\*40'HQ containers.
- Delivery Time: 10 days after receiving the deposit or origin LC
- Payment Terms: Western Union, L/C, T/T
- Supply Ability: 40 sets per month

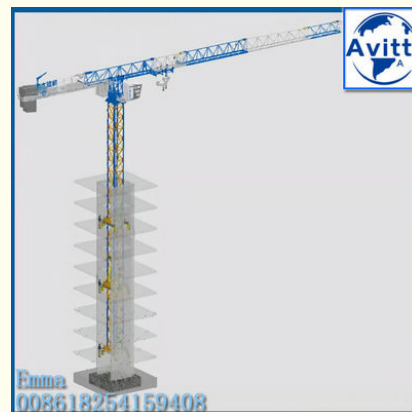

#### Product Specification

- Condition: 100% New
- Application: Buildings And Projects
- Type: Fixed And Internal Climbing
- Max. Load: 4t
- Jib Length: 40m
- Tip. Load: 1.0t
- Power supply: 380V/50Hz Or According To Client's Requirements
- Mast section: 1.2\*1.2\*3m S24
- Highlight: **In Brazil Tower Crane,  
4t Inner Climbing Tower Crane**

for more products please visit us on [hycmtowercrane.com](http://hycmtowercrane.com)

## Product Description

### PT4010 Inner Climbing Tower Crane with S24 Mast Setion In Brazil

#### Description of QTZ40 Internal Climbing Tower Crane

Internal climbing tower crane adopts hydraulic climbing method, usually installed inside the building elevator. The working radius is fully utilized and so the working range is wide, valid hoisting capacity is strong compared to external climbing tower crane.

The crane climbs with the increase of the building height. The maximum hoisting height is 120m and standard mast height is only 26.4 m, which saves lots of purchasing cost, transportation fees and maintenance expenses.


#### Specification of QTZ40 Internal Climbing Tower Crane

|                            |   |
|----------------------------|---|
| Model                      | QTZ40 (4010) Tower Crane                        |
| Type                       | Internal climbing                               |
| Rated Lifting Moment(KN.M) | 400   |
| Rated Loading Capacity(T)  | 4   |
| Max. Lifting Load(T)       | 4   |
| Tip Load(T)                | 1.0   |
| Mast section height(M)     | 26.3  |
| Span(M)                    | 40  |
| Working range(M)           | 3 to 40   |
| Slewing speed(r/min)       | 0.7/0.35  |
| Trolley peed(m/min)        | 38.6/25.2                                       |
| Jacking-up speed(m/min)    | 0.4   |
| Power supply               | 380V/50Hz or according to client's requirements |
| Power Capacity(KW)         | 24.9  |
| Electric switch box        | Schneider                                       |
| Hoisting speed(m/min)      | (a=2) 65.14/32.57/7.0; (a=4) 32.14/15.6/3.5     |
| Mast section(m)            | 1.2*1.2*3                                       |

#### Advantages of QTZ40 Internal Climbing Tower Crane

1. High Climbing Capacity
2. Best Economic Benefit
3. High Reliability
4. Multiple Usages
5. Convenient Installation and Dismantling

#### New design Internal Climbing system which is center climbing

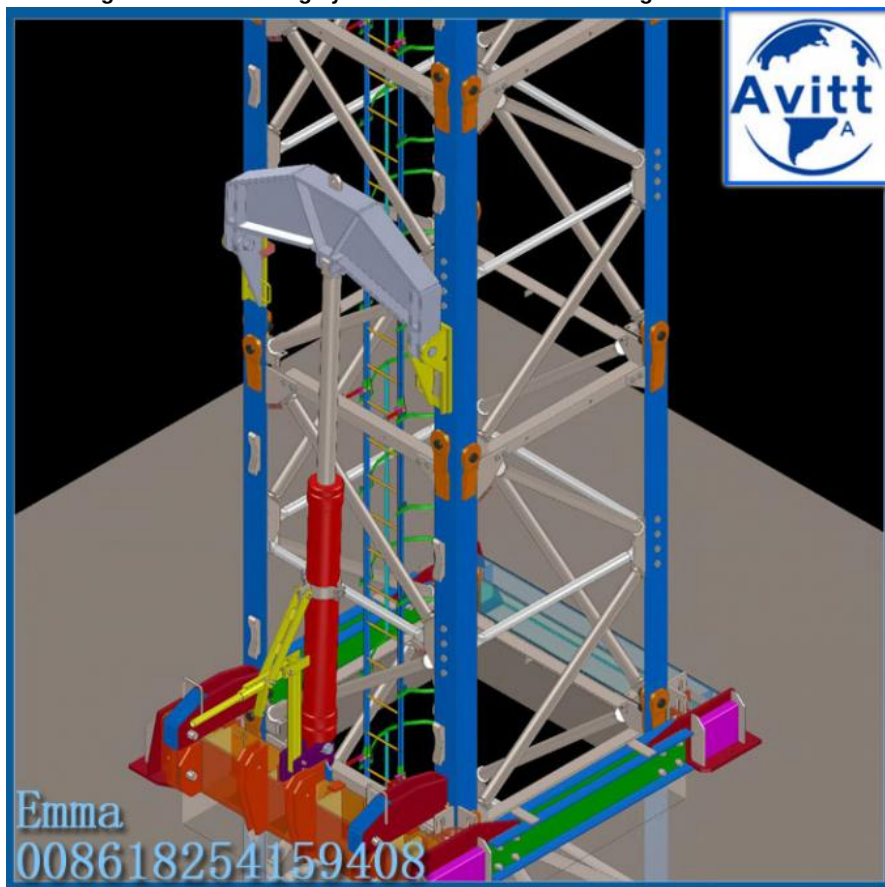



**Jinan Avitt International Trade Co., Ltd-HYCM Tower Crane**



0086-18254159408



emma1109@foxmail.com



hycmtowercrane.com

No.218-1, Building 8, Comprehensive Building, Zone 8, Dongshan Garden, Shuangshan Street, Zhangqiu District, Jinan City, Shandong Province, China